


# Zahnriemenscheiben MXL 025

Teilung 0,08" (2,032 mm) - Riemenbreite 1/4" (6,35 mm)


Antriebstechnik  
Ketten für Antrieb und Förderung

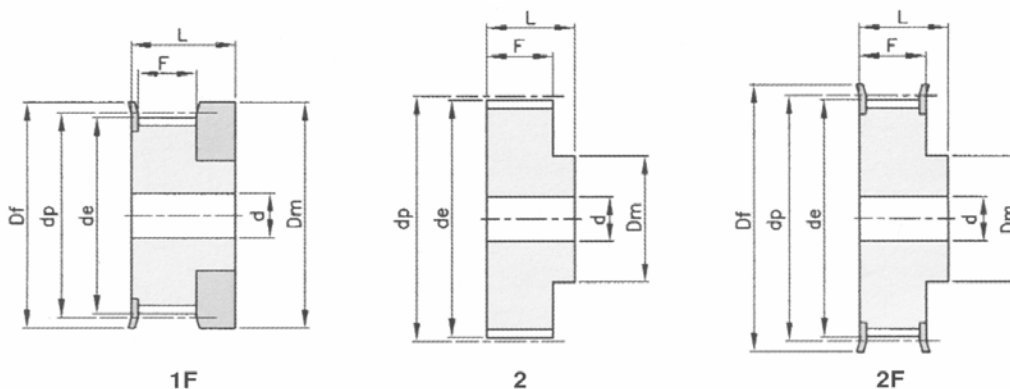

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
16 MXL 025	1F	Al	16	10,35	9,84	15	15	8,5	16		0,01
18 MXL 025	1F	Al	18	11,64	11,13	16	16	8,5	16		0,01
20 MXL 025	1F	Al	20	12,94	12,43	16	16	8,5	16		0,01
22 MXL 025	2F	Al	22	14,23	13,72	18	10	11	16	3	0,01
24 MXL 025	2F	Al	24	15,52	15,02	18	10	11	16	3	0,01
28 MXL 025	2F	Al	28	18,11	17,60	23	11	11	16	3	0,01
30 MXL 025	2F	Al	30	19,40	18,90	23	12	11	16	4	0,02
32 MXL 025	2F	Al	32	20,70	20,19	25	14	11	16	4	0,02
36 MXL 025	2F	Al	36	23,29	22,78	28	16	11	16	4	0,02
40 MXL 025	2F	Al	40	25,87	25,36	32	18	11	16	4	0,02
42 MXL 025	2F	Al	42	27,17	26,66	32	18	11	16	5	0,03
44 MXL 025	2F	Al	44	28,46	27,95	36	18	11	16	5	0,03
48 MXL 025	2	Al	48	31,05	30,54		20	11	16	5	0,03
60 MXL 025	2	Al	60	38,81	38,30		24	11	16	5	0,04
72 MXL 025	2	Al	72	46,57	46,06		25	11	16	6	0,05

## Zahnriemenscheiben XL 037


Teilung 1/5" (5,08 mm) - Riemenbreite 3/8" (9,52 mm)

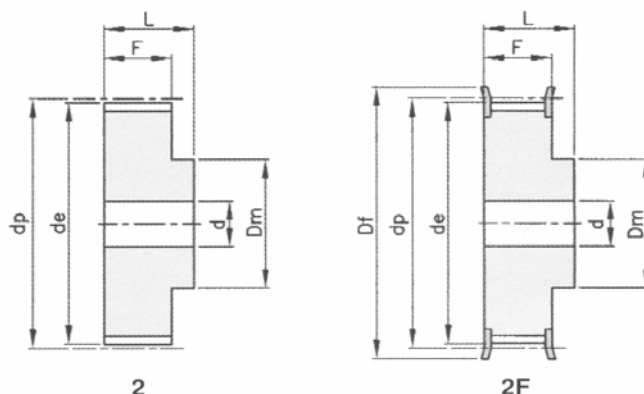

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 XL 037	2F	Al	10	16,17	15,66	23	10	14,3	20		0,01
11 XL 037	2F	Al	11	17,79	17,28	23	10	14,3	20		0,01
12 XL 037	2F	Al	12	19,40	18,90	25	10	14,3	20		0,01
13 XL 037	2F	Al	13	21,02	20,51	25	10	14,3	20		0,01
14 XL 037	2F	Al	14	22,64	23,13	28	16	14,3	20		0,02
15 XL 037	2F	Al	15	24,25	23,75	28	16	14,3	20		0,02
16 XL 037	2F	Al	16	25,87	25,36	32	16	14,3	20		0,03
17 XL 037	2F	Al	17	27,49	26,98	32	20	14,3	20		0,03
18 XL 037	2F	Al	18	29,11	28,60	36	20	14,3	20		0,04
19 XL 037	2F	Al	19	30,72	30,21	36	20	14,3	22		0,04
20 XL 037	2F	Al	20	32,34	31,83	38	25	14,3	22		0,05
21 XL 037	2F	Al	21	33,96	33,45	38	25	14,3	22		0,05
22 XL 037	2F	Al	22	35,57	35,07	42	25	14,3	22		0,06
24 XL 037	2F	Al	24	38,81	38,30	44	30	14,3	22		0,06
26 XL 037	2F	Al	26	42,04	41,53	48	30	14,3	22	8	0,09
27 XL 037	2F	Al	27	43,66	43,15	48	34	14,3	22	8	0,09
28 XL 037	2F	Al	28	45,28	44,77	51	34	14,3	22	8	0,10
30 XL 037	2F	Al	30	48,51	48,00	54	38	14,3	22	8	0,12
32 XL 037	2F	Al	32	51,74	51,24	57	38	14,3	25	8	0,12
34 XL 037	2F	Al	34	54,98	54,47	60	38	14,3	25	8	0,13
35 XL 037	2F	Al	35	56,60	56,09	63	38	14,3	25	8	0,14
36 XL 037	2	Al	36	58,21	57,70		45	14,3	25	8	0,14
38 XL 037	2	Al	38	61,45	60,94		45	14,3	25	8	0,15
40 XL 037	2	Al	40	64,68	64,17		45	14,3	25	8	0,16
42 XL 037	2	Al	42	67,91	67,41		45	14,3	25	8	0,18
44 XL 037	2	Al	44	71,15	70,64		45	14,3	25	8	0,19
48 XL 037	2	Al	48	77,62	77,11		45	14,3	25	10	0,19
52 XL 037	2	Al	52	84,08	83,57		45	14,3	25	10	0,19
60 XL 037	2	Al	60	97,02	96,51		45	14,3	25	10	0,22
72 XL 037	2	Al	72	116,42	115,92		45	14,3	25	10	0,44

## Zahnriemenscheiben L 050

Teilung 3/8" (9,525 mm) - Riemenbreite 1/2" (12,7 mm)

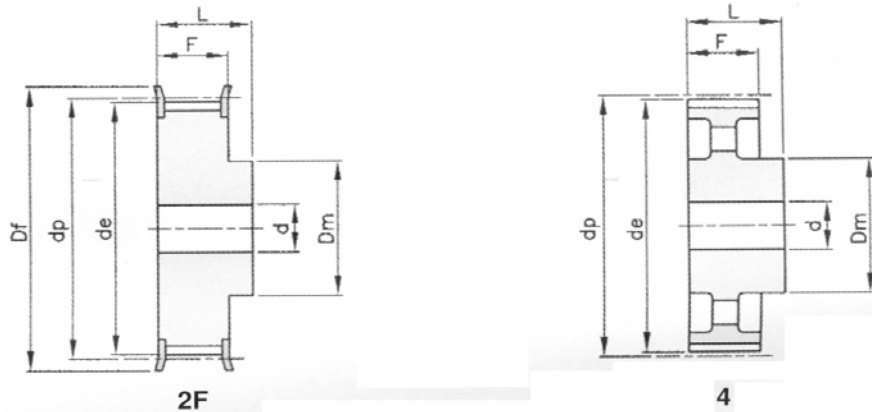


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
------	------	----------	-----------	----	----	----	----	---	---	---	----

10 L 050	2F	ST	10	30,32	29,56	36	20	19,0	28	8	0,11
11 L 050	2F	ST	11	33,35	32,59	38	24	19,0	30	8	0,14
12 L 050	2F	ST	12	36,38	35,62	42	24	19,0	30	8	0,17
13 L 050	2F	ST	13	39,41	38,65	44	28	19,0	30	8	0,21
14 L 050	2F	ST	14	42,44	41,68	48	28	19,0	30	8	0,24
15 L 050	2F	ST	15	45,48	44,72	51	34	19,0	30	8	0,29
16 L 050	2F	ST	16	48,51	47,75	54	36	19,0	32	8	0,33
17 L 050	2F	ST	17	51,54	50,78	57	36	19,0	32	10	0,38
18 L 050	2F	ST	18	54,57	53,81	60	40	19,0	32	10	0,44
19 L 050	2F	ST	19	57,61	56,84	63	40	19,0	32	10	0,47
20 L 050	2F	ST	20	60,64	59,88	66	40	19,0	32	10	0,51
21 L 050	2F	ST	21	63,67	62,91	71	45	19,0	32	10	0,60
22 L 050	2F	ST	22	66,70	65,94	75	45	19,0	32	10	0,64
23 L 050	2F	ST	23	69,73	68,97	79	55	19,0	32	10	0,78
24 L 050	2F	ST	24	72,77	72,00	79	55	19,0	32	10	0,81
25 L 050	2F	ST	25	75,80	75,04	83	58	19,0	32	10	0,89
26 L 050	2F	ST	26	78,83	78,07	87	58	19,0	32	12	0,94
27 L 050	2F	ST	27	81,86	81,10	87	58	19,0	32	12	0,99
28 L 050	2F	ST	28	84,89	84,13	91	58	19,0	32	12	1,04
30 L 050	2F	ST	30	90,96	90,20	97	70	19,0	32	12	1,17
32 L 050	2F	ST	32	97,03	96,26	103	70	19,0	32	12	1,41
33 L 050	2F	ST	33	100,05	99,29	106	70	19,0	32	12	1,49
34 L 050	2F	ST	34	103,08	102,32	111	70	19,0	32	12	1,57
35 L 050	2F	ST	35	106,12	105,35	111	70	19,0	32	12	1,62
36 L 050	2F	ST	36	109,15	108,39	115	70	19,0	32	12	1,70
40 L 050	2F	ST	40	121,29	120,51	127	70	19,0	32	12	2,03
42 L 050	2F	ST	42	127,34	126,58	135	70	19,0	32	12	2,21
44 L 050	2F	ST	44	133,40	132,64	140	70	19,0	32	12	2,38
45 L 050	2F	ST	45	136,44	135,67	143	70	19,0	32	12	2,48
48 L 050	2F	ST	48	145,53	144,77	152	70	19,0	32	12	2,78
50 L 050	4	GG	50	151,60	150,83		70	19,0	32	14	1,74
52 L 050	4	GG	52	157,66	156,90		70	19,0	32	14	1,80
56 L 050	4	GG	56	169,79	169,02		70	19,0	32	14	1,87
57 L 050	4	GG	57	172,82	172,06		70	19,0	32	14	1,88
60 L 050	4	GG	60	181,91	181,15		75	19,0	42	14	2,41
72 L 050	4	GG	72	218,29	217,53		75	19,0	42	14	2,82
84 L 050	4	GG	84	254,68	253,92		75	19,0	42	14	3,08
96 L 050	4	GG	96	291,06	290,30		75	19,0	42	14	3,42

## Zahnriemenscheiben L 075

Teilung 3/8" (9,525 mm) - Riemenbreite 3/4" (19,05 mm)

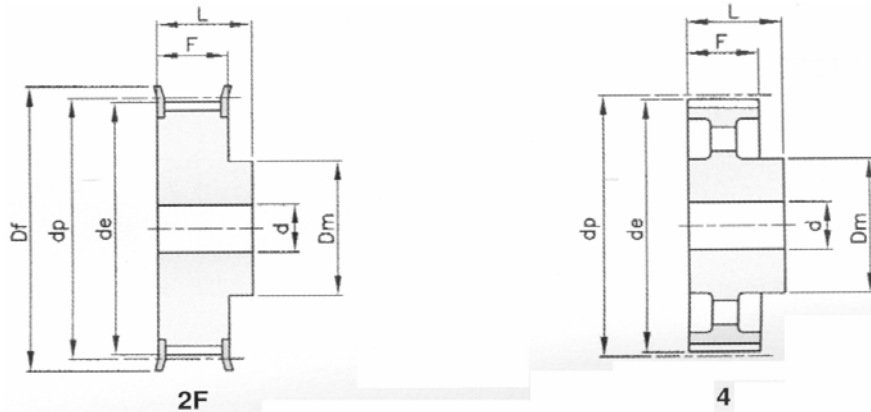


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 L 075	2F	ST	10	30,32	29,56	36	20	25,4	38	8	0,14
11 L 075	2F	ST	11	33,35	32,59	38	24	25,4	38	8	0,18
12 L 075	2F	ST	12	36,38	35,62	42	24	25,4	38	8	0,22
12 L 075	2F	ST	13	39,41	38,65	44	28	25,4	38	8	0,26
14 L 075	2F	ST	14	42,44	41,68	48	28	25,4	38	8	0,30
15 L 075	2F	ST	15	45,48	44,72	51	34	25,4	38	8	0,37
16 L 075	2F	ST	16	48,51	47,75	54	36	25,4	38	10	0,43
17 L 075	2F	ST	17	51,54	50,78	57	36	25,4	38	10	0,46
18 L 075	2F	ST	18	54,57	53,81	60	40	25,4	38	10	0,54
19 L 075	2F	ST	19	57,61	56,84	63	40	25,4	38	10	0,58
20 L 075	2F	ST	20	60,64	59,88	66	40	25,4	38	10	0,64
21 L 075	2F	ST	21	63,67	62,91	71	45	25,4	38	10	0,71
22 L 075	2F	ST	22	66,70	65,94	75	45	25,4	38	10	0,79
23 L 075	2F	ST	23	69,73	68,97	79	55	25,4	38	10	0,94
24 L 075	2F	ST	24	72,77	72,00	79	55	25,4	38	10	1,00
25 L 075	2F	ST	25	75,80	75,04	83	58	25,4	38	10	1,10
26 L 075	2F	ST	26	78,83	78,07	87	58	25,4	38	12	1,16
27 L 075	2F	ST	27	81,86	81,10	87	58	25,4	38	12	1,22
28 L 075	2F	ST	28	84,89	84,13	91	58	25,4	38	12	1,30
30 L 075	2F	ST	30	90,96	90,20	97	70	25,4	38	12	1,47
32 L 075	2F	ST	32	97,03	96,26	103	70	25,4	38	12	1,75
33 L 075	2F	ST	33	100,05	99,29	106	70	25,4	38	12	1,85
34 L 075	2F	ST	34	103,08	102,32	111	70	25,4	38	12	1,93
35 L 075	2F	ST	35	106,12	105,35	111	70	25,4	38	12	2,03
36 L 075	2F	ST	36	109,15	108,39	115	70	25,4	38	12	2,14
40 L 075	2F	ST	40	121,29	120,51	127	70	25,4	38	12	2,56
42 L 075	2F	ST	42	127,34	126,58	135	70	25,4	38	12	2,81
44 L 075	2F	ST	44	133,40	132,64	140	70	25,4	38	12	3,02
45 L 075	2F	ST	45	136,44	135,67	143	70	25,4	38	12	3,16
48 L 075	2F	ST	48	145,53	144,77	152	70	25,4	38	12	3,57
50 L 075	4	GG	50	151,60	150,83		70	25,4	38	14	2,10
52 L 075	4	GG	52	157,66	156,90		70	25,4	38	14	2,13
56 L 075	4	GG	56	169,79	169,02		70	25,4	38	14	2,27
57 L 075	4	GG	57	172,82	172,06		70	25,4	38	14	2,28
60 L 075	4	GG	60	181,91	181,15		75	25,4	45	14	2,70
75 L 075	4	GG	72	218,29	217,53		75	25,4	45	14	3,19
84 L 075	4	GG	84	254,68	253,92		75	25,4	45	14	3,64
96 L 075	4	GG	96	291,06	290,30		75	25,4	45	14	4,04

KG AHI Antriebselemente - Mönchhusen 20 - D-32549 Bad Oeynhausen

Tel. +49/(0)5731/5302-0 - Fax +49/(0)5731/5302-50 - Email sales@kahi-ketten.de

## Zahnriemenscheiben L 100

Teilung 3/8" (9,525 mm) - Riemenbreite 1" (25,4 mm)

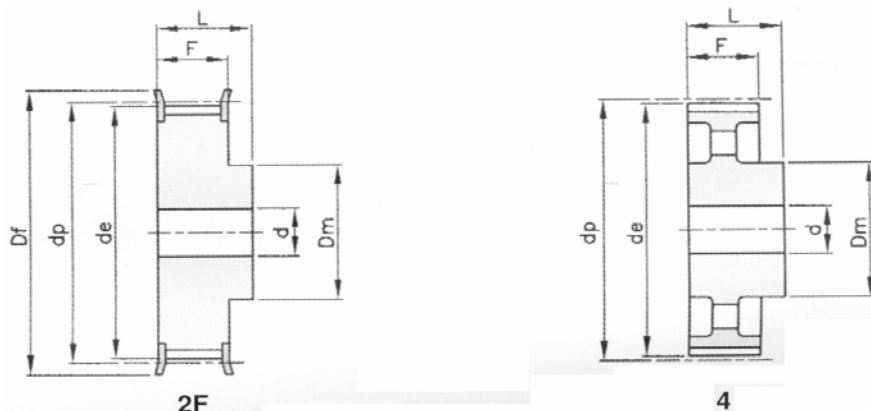


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 L 100	2F	ST	10	30,32	29,56	36	20	31,8	45	8	0,17
11 L 100	2F	ST	11	33,35	32,59	38	24	31,8	45	8	0,22
12 L 100	2F	ST	12	36,38	35,62	42	24	31,8	45	8	0,26
13 L 100	2F	ST	13	39,41	38,65	44	28	31,8	45	10	0,32
14 L 100	2F	ST	14	42,44	41,68	48	28	31,8	45	10	0,35
15 L 100	2F	ST	15	45,48	44,72	51	34	31,8	45	10	0,43
16 L 100	2F	ST	16	48,51	47,75	54	36	31,8	45	10	0,50
17 L 100	2F	ST	17	51,54	50,78	57	36	31,8	45	10	0,56
18 L 100	2F	ST	18	54,57	53,81	60	40	31,8	45	10	0,64
19 L 100	2F	ST	19	57,61	56,84	63	40	31,8	45	10	0,70
20 L 100	2F	ST	20	60,64	59,88	66	40	31,8	45	10	0,77
21 L 100	2F	ST	21	63,67	62,91	71	45	31,8	45	12	0,88
22 L 100	2F	ST	22	66,70	65,94	75	45	31,8	45	12	0,95
23 L 100	2F	ST	23	69,73	68,97	79	55	31,8	45	12	1,11
24 L 100	2F	ST	24	72,77	72,00	79	55	31,8	45	12	1,18
25 L 100	2F	ST	25	75,80	75,04	83	58	31,8	45	12	1,30
26 L 100	2F	ST	26	78,83	78,07	87	58	31,8	45	12	1,40
27 L 100	2F	ST	27	81,86	81,10	87	58	31,8	45	12	1,47
28 L 100	2F	ST	28	84,89	84,13	91	58	31,8	45	12	1,58
30 L 100	2F	ST	30	90,96	90,20	97	70	31,8	45	12	1,78
32 L 100	2F	ST	32	97,03	96,26	103	70	31,8	45	12	2,11
33 L 100	2F	ST	33	100,05	99,29	106	70	31,8	45	12	2,23
34 L 100	2F	ST	34	103,08	102,32	111	70	31,8	45	12	2,39
35 L 100	2F	ST	35	106,12	105,35	111	70	31,8	45	12	2,45
36 L 100	2F	ST	36	109,15	108,39	115	70	31,8	45	12	2,59
40 L 100	2F	ST	40	121,29	120,51	127	70	31,8	45	12	3,13
42 L 100	2F	ST	42	127,34	126,58	135	70	31,8	45	12	3,43
44 L 100	2F	ST	44	133,40	132,64	140	70	31,8	45	12	3,72
45 L 100	2F	ST	45	136,44	135,67	143	70	31,8	45	12	3,89
48 L 100	2F	ST	48	145,53	144,77	152	70	31,8	45	12	4,38
50 L 100	4	GG	50	151,60	150,83		70	31,8	45	14	2,41
52 L 100	4	GG	52	157,66	156,90		70	31,8	45	14	2,55
56 L 100	4	GG	56	169,79	169,02		70	31,8	45	14	2,65
57 L 100	4	GG	57	172,82	172,06		70	31,8	45	14	2,71
60 L 100	4	GG	60	181,91	181,15		75	31,8	45	14	3,11
72 L 100	4	GG	72	218,29	217,53		75	31,8	45	14	3,65
84 L 100	4	GG	84	254,68	253,92		75	31,8	45	14	4,12
96 L 100	4	GG	96	291,06	290,30		75	31,8	45	14	4,60

KG AHI Antriebselemente - Mönchhusen 20 - D-32549 Bad Oeynhausen

Tel. +49/(0)5731/5302-0 - Fax +49/(0)5731/5302-50 - Email sales@kahi-ketten.de

## Zahnriemenscheiben H 075


Teilung 1/2" (12,7 mm) - Riemenbreite 3/4" (19,05 mm)

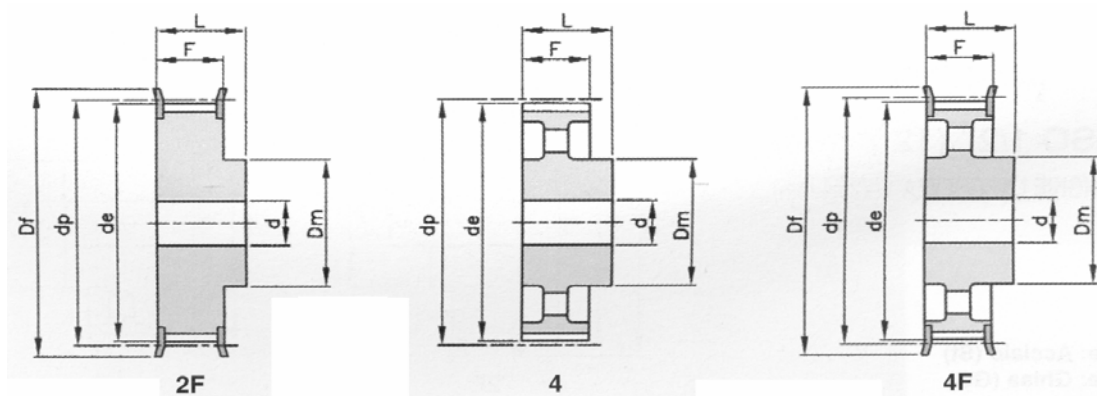

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 075	2F	ST	14	56,59	55,22	63	40	26,4	40	10	0,58
15 H 075	2F	ST	15	60,64	59,27	66	45	26,4	40	10	0,69
16 H 075	2F	ST	16	64,68	63,31	71	45	26,4	40	10	0,77
17 H 075	2F	ST	17	68,72	67,35	75	45	26,4	40	12	0,84
18 H 075	2F	ST	18	72,77	71,39	79	55	26,4	40	12	1,01
19 H 075	2F	ST	19	76,81	75,44	83	60	26,4	40	12	1,15
20 H 075	2F	ST	20	80,85	79,48	87	62	26,4	40	12	1,27
21 H 075	2F	ST	21	84,89	83,52	91	65	26,4	40	12	1,41
22 H 075	2F	ST	22	88,94	87,56	93	68	26,4	40	12	1,55
23 H 075	2F	ST	23	92,98	91,61	97	72	26,4	40	12	1,71
24 H 075	2F	ST	24	97,03	95,65	103	72	26,4	40	12	1,83
25 H 075	2F	ST	25	101,06	99,69	106	72	26,4	40	12	1,96
26 H 075	2F	ST	26	105,11	103,73	111	80	26,4	40	12	2,19
27 H 075	2F	ST	27	109,15	107,78	115	80	26,4	40	12	2,32
28 H 075	2F	ST	28	113,19	111,82	119	80	26,4	40	12	2,47
30 H 075	2F	ST	30	121,29	119,90	127	80	26,4	40	14	2,76
32 H 075	2F	ST	32	129,36	127,99	135	80	26,4	40	14	3,08
33 H 075	2F	ST	33	133,40	132,03	140	80	26,4	40	14	3,25
34 H 075	2F	ST	34	137,45	136,07	143	80	26,4	40	14	3,42
35 H 075	2F	St	35	141,49	140,12	148	80	26,4	40	14	3,61
36 H 075	2F	ST	36	145,53	144,16	152	80	26,4	40	14	3,79
38 H 075	2F	ST	38	153,62	152,24	158	80	26,4	40	14	4,16
40 H 075	2F	ST	40	161,70	160,33	168	80	26,4	40	14	4,58
44 H 075	4F	GG	44	177,87	176,50	184	80	26,4	40	18	2,57
48 H 075	4F	GG	48	194,04	192,67	200	90	26,4	45	18	3,56
50 H 075	4	GG	50	202,13	200,75		90	26,4	45	18	3,74

## Zahnriemenscheiben H 100


Teilung 1/2" (12,7 mm) - Riemenbreite 1" (25,4 mm)

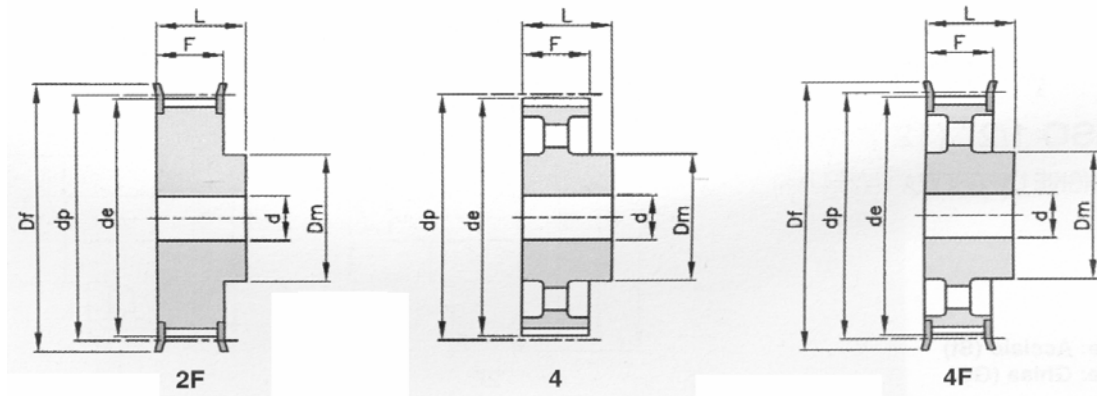

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 100	2F	ST	14	56,59	55,22	63	40	31,8	45	12	0,65
15 H 100	2F	ST	15	60,64	59,27	66	45	31,8	45	12	0,77
16 H 100	2F	ST	16	64,68	63,31	71	45	31,8	45	12	0,87
17 H 100	2F	ST	17	68,72	67,35	75	45	31,8	45	12	0,97
18 H 100	2F	ST	18	72,77	71,39	79	55	31,8	45	12	1,16
19 H 100	2F	ST	19	76,81	75,44	83	60	31,8	45	14	1,30
20 H 100	2F	ST	20	80,85	79,48	87	62	31,8	45	14	1,44
21 H 100	2F	ST	21	84,89	83,52	91	65	31,8	45	14	1,60
22 H 100	2F	ST	22	88,94	87,56	93	68	31,8	45	14	1,76
23 H 100	2F	ST	23	92,98	91,61	97	72	31,8	45	14	1,94
24 H 100	2F	ST	24	97,03	95,65	103	72	31,8	45	14	2,09
25 H 100	2F	ST	25	101,06	99,69	106	72	31,8	45	14	2,24
26 H 100	2F	ST	26	105,11	103,73	111	80	31,8	45	14	2,49
27 H 100	2F	ST	27	109,15	107,78	115	80	31,8	45	14	2,66
28 H 100	2F	ST	28	113,19	111,82	119	80	31,8	45	14	2,83
29 H 100	2F	ST	29	117,23	115,86	123	80	31,8	45	14	3,01
30 H 100	2F	ST	30	121,29	119,90	127	80	31,8	45	14	3,19
32 H 100	2F	ST	32	129,36	127,99	135	80	31,8	45	14	3,57
33 H 100	2F	ST	33	133,40	132,03	140	80	31,8	45	14	3,79
34 H 100	2F	ST	34	137,45	136,07	143	80	31,8	45	14	3,99
35 H 100	2F	ST	35	141,49	140,12	148	80	31,8	45	14	4,20
36 H 100	2F	ST	36	145,53	144,16	152	80	31,8	45	14	4,44
38 H 100	2F	ST	38	153,62	152,24	158	80	31,8	45	14	4,90
40 H 100	2F	ST	40	161,70	160,33	168	80	31,8	45	14	5,39
44 H 100	4F	GG	44	177,87	176,50	184	80	31,8	50	18	3,37
45 H 100	4F	GG	45	181,91	180,54	192	80	31,8	50	18	3,57
48 H 100	4F	GG	48	194,04	192,67	200	90	31,8	50	18	4,10
50 H 100	4	GG	50	202,13	200,75		90	31,8	50	18	4,24
52 H 100	4	GG	52	210,21	208,84		90	31,8	50	18	4,32
58 H 100	4	GG	58	234,47	233,09		90	31,8	50	18	4,61
60 H 100	4	GG	60	242,55	241,18		100	31,8	50	18	5,30
70 H 100	4	GG	70	282,98	281,61		100	31,8	55	18	6,13
72 H 100	4	GG	72	291,06	289,69		120	31,8	55	18	7,47
84 H 100	4	GG	84	339,57	338,20		120	31,8	55	18	8,52
96 H 100	4	GG	96	388,08	386,71		120	31,8	60	18	10,25
120 H 100	4	GG	120	485,10	483,73		120	31,8	60	18	13,09

## Zahnriemenscheiben H 150

Teilung 1/2" (12,7 mm) - Riemenbreite 1 1/2" (38,1 mm)

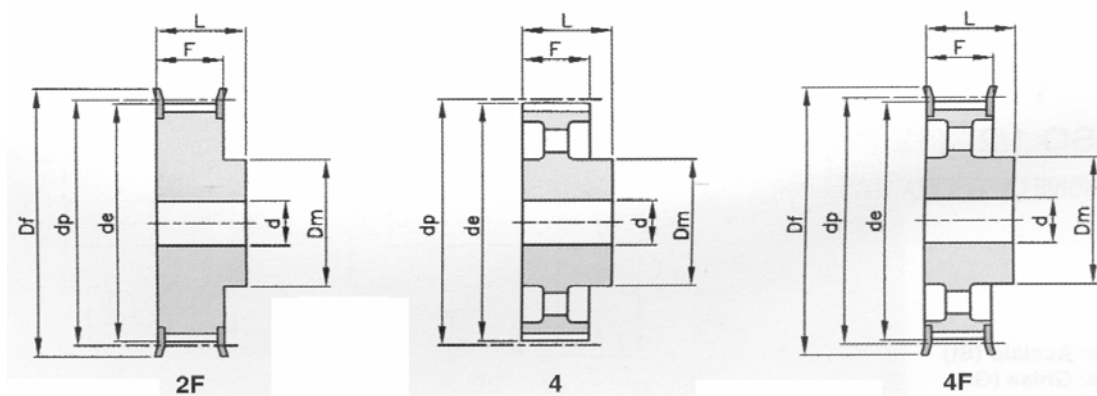


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 150	2F	ST	14	56,59	55,22	63	40	46,0	58	18	0,81
15 H 150	2F	ST	15	60,64	59,27	66	45	46,0	58	18	0,97
16 H 150	2F	ST	16	64,68	63,31	71	45	46,0	58	18	1,11
17 H 150	2F	ST	17	68,72	67,35	75	45	46,0	58	18	1,25
18 H 150	2F	ST	18	72,77	71,39	79	55	46,0	58	18	1,48
19 H 150	2F	ST	19	76,81	75,44	83	60	46,0	58	18	1,68
20 H 150	2F	ST	20	80,85	79,48	87	52	46,0	58	18	1,88
21 H 150	2F	ST	21	84,89	83,52	91	65	46,0	58	18	2,08
22 H 150	2F	ST	22	88,94	87,56	93	68	46,0	58	18	2,3
23 H 150	2F	ST	23	92,98	91,61	97	72	46,0	58	18	2,54
24 H 150	2F	ST	24	97,03	95,65	103	72	46,0	58	18	2,75
25 H 150	2F	ST	25	101,06	99,69	106	72	46,0	58	18	2,97
26 H 150	2F	ST	26	105,11	103,73	111	80	46,0	58	18	3,29
27 H 150	2F	ST	27	109,15	107,78	115	80	46,0	58	18	3,52
28 H 150	2F	ST	28	113,19	111,82	119	80	46,0	58	18	3,78
29 H 150	2F	ST	29	117,23	115,86	123	80	46,0	58	18	4,03
30 H 150	2F	ST	30	121,29	119,90	127	80	46,0	58	18	4,29
32 H 150	2F	ST	32	129,36	127,99	135	80	46,0	58	18	4,86
33 H 150	2F	ST	33	133,40	132,03	140	80	46,0	58	18	5,15
34 H 150	2F	ST	34	137,45	136,07	143	80	46,0	58	18	5,46
35 H 150	2F	ST	35	141,49	140,12	148	80	46,0	58	18	5,78
36 H 150	2F	ST	36	145,53	144,16	152	80	46,0	58	18	6,09
38 H 150	2F	ST	38	153,62	152,24	158	80	46,0	58	18	6,74
40 H 150	2F	ST	40	161,70	160,33	168	80	46,0	58	18	7,46
44 H 150	4F	GG	44	177,87	176,50	184	80	46,0	58	18	4,29
45 H 150	4F	GG	45	181,91	180,54	192	80	46,0	58	18	4,44
48 H 150	4F	GG	48	194,04	192,67	200	90	46,0	65	18	5,41
50 H 150	4	GG	50	202,13	200,75		90	46,0	65	18	5,59
52 H 150	4	GG	52	210,21	208,84		90	46,0	65	18	5,79
58 H 150	4	GG	58	234,47	233,09		90	46,0	65	18	6,15
60 H 150	4	GG	60	242,55	241,18		100	46,0	65	18	7,08
70 H 150	4	GG	70	282,98	281,61		100	46,0	65	24	7,77
72 H 150	4	GG	72	291,06	289,69		120	46,0	65	24	9,70
84 H 150	4	GG	84	339,57	338,20		120	46,0	65	24	10,99
96 H 150	4	GG	96	388,08	386,71		120	46,0	65	24	12,24
120 H 150	4	GG	120	485,10	483,73		120	46,0	65	24	16,17



## Zahnriemenscheiben H 200


Teilung 1/2" (12,7 mm) - Riemenbreite 2" (50,8 mm)

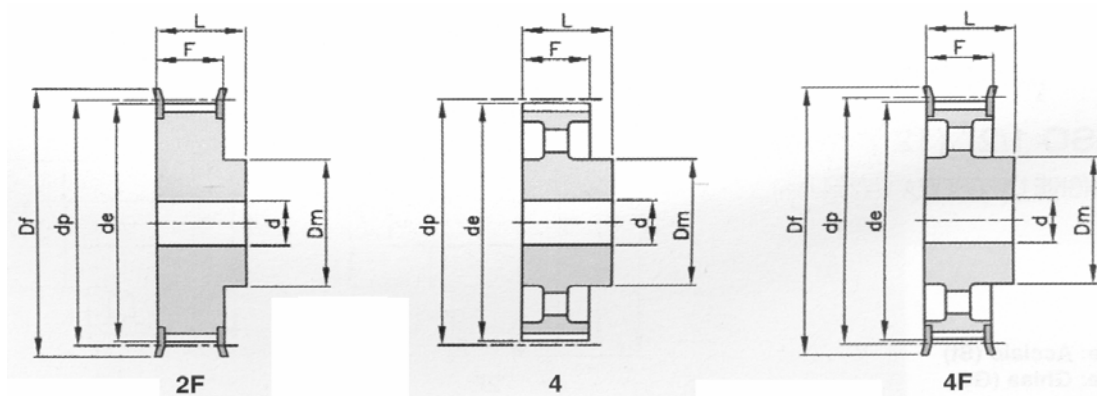

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 200	2F	ST	14	56,59	55,22	63	40	58,7	70	18	1,10
15 H 200	2F	ST	15	60,64	59,27	66	45	58,7	70	18	1,33
16 H 200	2F	ST	16	64,68	63,31	71	45	58,7	70	18	1,54
17 H 200	2F	ST	17	68,72	67,35	75	45	58,7	70	18	1,69
18 H 200	2F	ST	18	72,77	71,39	79	55	58,7	70	18	1,95
19 H 200	2F	ST	19	76,81	75,44	83	60	58,7	70	18	2,20
20 H 200	2F	ST	20	80,85	79,48	87	62	58,7	70	18	2,44
21 H 200	2F	ST	21	84,89	83,52	91	65	58,7	70	18	2,70
22 H 200	2F	ST	22	88,94	87,56	93	68	58,7	70	18	2,97
23 H 200	2F	ST	23	92,98	91,61	97	72	58,7	70	18	3,25
24 H 200	2F	ST	24	97,03	95,65	103	72	58,7	70	18	3,56
25 H 200	2F	ST	25	101,06	99,69	106	72	58,7	70	18	3,81
26 H 200	2F	ST	26	105,11	103,73	111	80	58,7	70	18	4,18
27 H 200	2F	ST	27	109,15	107,78	115	80	58,7	70	18	4,49
28 H 200	2F	ST	28	113,19	111,82	119	80	58,7	70	18	4,81
29 H 200	2F	ST	29	117,23	115,86	123	80	58,7	70	18	5,14
30 H 200	2F	ST	30	121,29	119,90	127	80	58,7	75	18	5,47
32 H 200	2F	ST	32	129,36	127,99	135	80	58,7	75	18	6,17
33 H 200	2F	ST	33	133,40	132,03	140	80	58,7	75	18	6,56
34 H 200	2F	ST	34	137,45	136,07	143	80	58,7	70	18	6,94
35 H 200	2F	ST	35	141,49	140,12	148	80	58,7	70	18	7,34
36 H 200	2F	ST	36	145,53	144,16	152	80	58,7	70	18	7,75
38 H 200	2F	ST	38	153,62	152,24	158	80	58,7	70	18	8,62
40 H 200	2F	ST	40	161,70	160,33	168	80	58,7	70	18	9,50
44 H 200	4F	GG	44	177,87	176,50	184	80	58,7	70	18	5,14
45 H 200	4F	GG	45	181,91	180,54	192	80	58,7	70	18	5,38
48 H 200	4F	GG	48	194,04	192,67	200	90	58,7	70	24	6,29
50 H 200	4	GG	50	202,13	200,75		90	58,7	70	24	6,68
52 H 200	4	GG	52	210,21	208,84		90	58,7	70	24	6,81
58 H 200	4	GG	58	234,47	233,09		90	58,7	75	24	7,26
60 H 200	4	GG	60	242,55	241,18		100	58,7	75	24	8,25
70 H 200	4	GG	70	282,98	281,61		100	58,7	75	28	9,20
72 H 200	4	GG	72	291,06	289,69		120	58,7	75	28	11,09
84 H 200	4	GG	84	339,57	338,20		120	58,7	75	28	12,63
96 H 200	4	GG	96	388,08	386,71		120	58,7	75	28	14,51
120 H 200	4	GG	120	485,10	483,73		120	58,7	75	28	19,15

## Zahnriemenscheiben H 300


Teilung 1/2" (12,7 mm) - Riemenbreite 3" (76,2 mm)

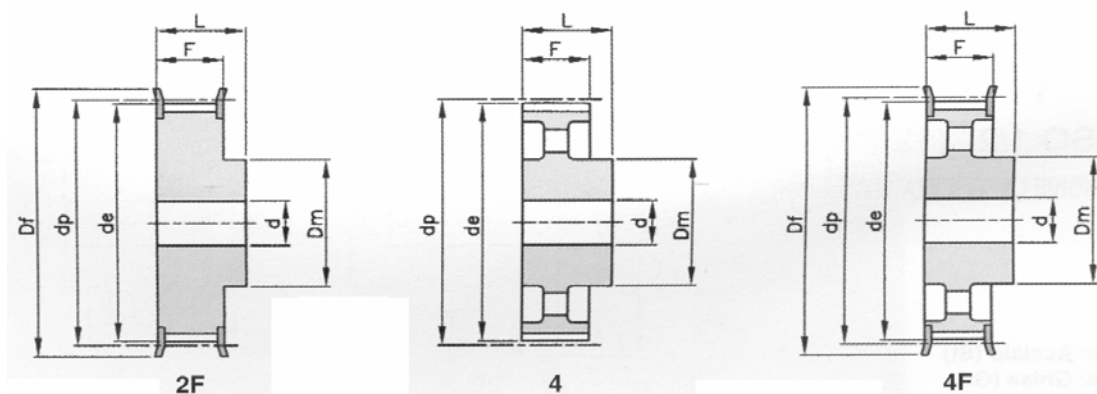

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 300	2F	ST	14	56,59	55,22	63	40	85,7	100	18	1,64
15 H 300	2F	ST	15	60,64	59,27	66	45	85,7	100	18	1,91
16 H 300	2F	ST	16	64,68	63,31	71	45	85,7	100	18	2,16
17 H 300	2F	ST	17	68,72	67,35	75	45	85,7	100	18	2,43
18 H 300	2F	ST	18	72,77	71,39	79	55	85,7	100	18	2,8
19 H 300	2F	ST	19	76,81	75,44	83	60	85,7	100	18	3,16
20 H 300	2F	ST	20	80,85	79,48	87	62	85,7	100	18	3,5
21 H 300	2F	ST	21	84,89	83,52	91	65	85,7	100	18	3,87
22 H 300	2F	ST	22	88,94	87,56	93	68	85,7	100	18	4,26
23 H 300	2F	ST	23	92,98	91,61	97	72	85,7	100	18	4,68
24 H 300	2F	ST	24	97,03	95,65	103	72	85,7	100	18	5,08
25 H 300	2F	ST	25	101,06	99,69	106	72	85,7	100	18	5,45
26 H 300	2F	ST	26	105,11	103,73	111	80	85,7	100	18	6,01
27 H 300	2F	ST	27	109,15	107,78	115	80	85,7	100	18	6,45
28 H 300	2F	ST	28	113,19	111,82	119	80	85,7	100	18	6,91
30 H 300	2F	ST	30	121,29	119,90	127	80	85,7	100	18	7,90
32 H 300	2F	ST	32	129,36	127,99	135	80	85,7	100	18	8,92
33 H 300	2F	ST	33	133,4	132,03	140	80	85,7	100	18	9,46
34 H 300	2F	ST	34	137,45	136,07	143	80	85,7	100	18	10,04
35 H 300	2F	ST	35	141,49	140,12	148	80	85,7	100	18	10,62
36 H 300	2F	ST	36	145,53	144,16	152	80	85,7	100	18	11,24
38 H 300	2F	ST	38	153,62	152,24	158	80	85,7	100	18	12,44
40 H 300	2F	ST	40	161,7	160,33	168	80	85,7	100	18	13,80
44 H 300	2F	GG	44	177,87	176,50	184	80	85,7	100	24	7,22
48 H 300	2F	GG	48	194,04	192,67	200	90	85,7	100	24	8,60
50 H 300	2F	GG	50	202,13	200,75		90	85,7	100	24	8,99
58 H 300	2F	GG	58	234,47	233,09		90	85,7	100	24	10,04
60 H 300	2F	GG	60	242,55	241,18		100	85,7	100	24	11,18
72 H 300	2F	GG	72	291,06	289,69		120	85,7	100	28	15,07
84 H 300	2F	GG	84	339,57	338,20		120	85,7	100	28	16,97
96 H 300	2F	GG	96	388,08	386,71		120	85,7	100	28	19,86
120 H 300	2F	GG	120	485,1	483,76		120	85,7	100	28	25,91

## Zahnriemenscheiben XH 200


Teilung 7/8" (22,22 mm) - Riemenbreite 2" (50,8 mm)



Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
18 HX 200	2F	ST	18	127,34	124,55	138	100	65	80	24	6,00
19 HX 200	2F	ST	19	134,41	131,62	146	100	65	80	24	6,60
20 HX 200	2F	ST	20	141,49	138,69	154	100	65	80	24	7,30
21 HX 200	2F	ST	21	148,56	145,77	160	110	65	80	24	8,73
22 HX 200	2F	ST	22	155,64	152,84	168	110	65	80	24	9,55
24 HX 200	2F	ST	24	169,79	166,99	183	120	65	80	24	11,47
25 HX 200	2F	ST	25	176,86	174,07	188	120	65	80	24	12,46
26 HX 200	2F	ST	26	183,93	181,14	198	120	65	80	24	13,47
27 HX 200	2F	ST	27	191,01	188,22	200	120	65	80	24	14,42
28 HX 200	2F	ST	28	198,09	195,29	211	120	65	80	24	15,44
30 HX 200	2F	ST	30	212,23	209,44	226	120	65	80	24	17,69
32 HX 200	2F	ST	32	226,38	223,59	240	120	65	80	24	19,95
34 HX 200	2F	ST	34	240,53	237,74	256	120	65	80	24	22,75

## Zahnriemenscheiben XH 300


Teilung 7/8" (22,22 mm) - Riemenbreite 3" (76,2 mm)



Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
18 HX 200	2F	ST	18	127,34	124,55	138	100	92	110	28	8,90
19 HX 200	2F	ST	19	134,41	131,62	146	100	92	110	28	9,20
20 HX 200	2F	ST	20	141,49	138,69	154	100	92	110	28	10,61
21 HX 200	2F	ST	21	148,56	145,77	160	110	92	110	28	11,87
22 HX 200	2F	ST	22	155,64	152,84	168	120	92	110	28	13,08
24 HX 200	2F	ST	24	169,79	166,99	183	120	92	110	28	15,77
25 HX 200	2F	ST	25	176,86	174,07	188	120	92	110	28	17,13
26 HX 200	2F	ST	26	183,93	181,14	198	120	92	110	28	18,55
27 HX 200	2F	ST	27	191,01	188,22	200	120	92	110	28	19,90
28 HX 200	2F	ST	28	198,09	195,29	211	150	92	110	28	22,27
30 HX 200	2F	ST	30	212,23	209,44	226	150	92	110	28	25,39
32 HX 200	2F	ST	32	226,38	223,59	240	150	92	110	28	28,73
34 HX 200	2F	ST	34	240,53	237,74	256	150	92	110	28	34,20

## Zahnriemenscheiben XH 400

Teilung 7/8" (22,22 mm) - Riemenbreite 4" (101,6 mm)




Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
18 HX 400	2F	ST	18	127,34	124,55	138	100	119	132	32	9,60
19 HX 400	2F	ST	19	134,41	131,62	146	100	119	132	32	10,80
20 HX 400	2F	ST	20	141,49	138,69	154	100	119	132	32	12,87
21 HX 400	2F	ST	21	148,56	145,77	160	110	119	132	32	14,42
22 HX 400	2F	ST	22	155,64	152,84	168	110	119	132	32	15,44
24 HX 400	2F	ST	24	169,79	166,99	183	120	119	132	32	19,22
25 HX 400	2F	ST	25	176,86	174,07	188	120	119	132	32	21,05
26 HX 400	2F	ST	26	183,93	181,14	198	120	119	132	32	22,80
27 HX 400	2F	ST	27	191,01	188,22	200	120	119	132	32	24,66
28 HX 400	2F	ST	28	198,09	195,29	211	150	119	132	32	27,23
30 HX 400	2F	ST	30	212,23	209,44	226	150	119	132	32	31,30
32 HX 400	2F	ST	32	226,38	223,59	240	150	119	132	32	35,20
34 HX 400	2F	ST	34	240,53	237,74	256	150	119	132	32	40,00



Antriebstechnik  
Ketten für Antrieb und Förderung

# Taper - Zahnriemenscheiben L 050

Teilung 3/8" (9,525 mm) - Riemenbreite 1/2" (12,7 mm)

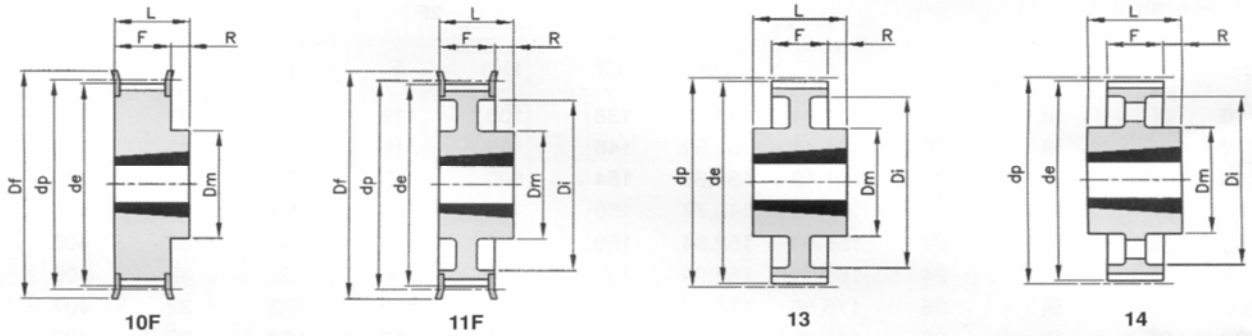


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 L 050	10 F	St.	18	1108	54,57	53,81	60	44		19,0	22,0	3	0,20
TL 19 L 050	10 F	St.	19	1108	57,61	56,84	63	44		19,0	22,0	3	0,23
TL 20 L 050	10 F	St.	20	1108	60,64	59,88	66	48		19,0	22,0	3	0,27
TL 21 L 050	10 F	St.	21	1108	63,67	62,91	71	48		19,0	22,0	3	0,30
TL 22 L 050	10 F	St.	22	1108	66,70	65,94	75	51		19,0	22,0	3	0,34
TL 23 L 050	10 F	St.	23	1108	69,73	68,97	79	54		19,0	22,0	3	0,40
TL 24 L 050	10 F	St.	24	1108	72,77	72,00	79	54		19,0	22,0	3	0,45
TL 25 L 050	10 F	St.	25	1108	75,80	75,04	83	56		19,0	22,0	3	0,50
TL 26 L 050	10 F	St.	26	1108	78,83	78,07	87	60		19,0	22,0	3	0,55
TL 27 L 050	10 F	St.	27	1108	81,86	81,10	87	62		19,0	22,0	3	0,60
TL 28 L 050	10 F	St.	28	1108	84,89	84,13	91	65		19,0	22,0	3	0,65
TL 30 L 050	10 F	St.	30	1108	90,96	90,20	97	70		19,0	22,0	3	0,80
TL 32 L 050	10 F	St.	32	1108	97,02	96,26	103	74		19,0	22,0	3	0,98
TL 36 L 050	10 F	St.	36	1108	109,15	108,39	115	85		19,0	22,0	3	1,20
TL 40 L 050	10 F	St.	40	1610	121,28	120,51	127	97		19,0	25,0	6	1,40
TL 48 L 050	11 F	St.	48	1610	145,53	144,77	152	88	120	19,0	25,0	6	2,30
TL 60 L 050	13	St.	60	1610	181,91	181,15		92	166	19,0	25,0	3	2,20
TL 72 L 050	14	GG	72	1610	218,30	217,53		92	202	19,0	25,0	3	2,10
TL 84 L 050	14	GG	84	1610	254,68	253,90		92	236	19,0	25,0	3	2,46
TL 96 L 050	14	GG	96	2012	291,06	290,30		106	270	19,0	32,0	6,5	3,36
TL 120 L 050	14	GG	120	2012	363,83	363,07		106	343	19,0	32,0	6,5	4,44




**Antriebstechnik**  
Ketten für Antrieb und Förderung

# Taper - Zahnriemenscheiben L 075

Teilung 3/8" (9,525 mm) - Riemenbreite 3/4" (19,05 mm)

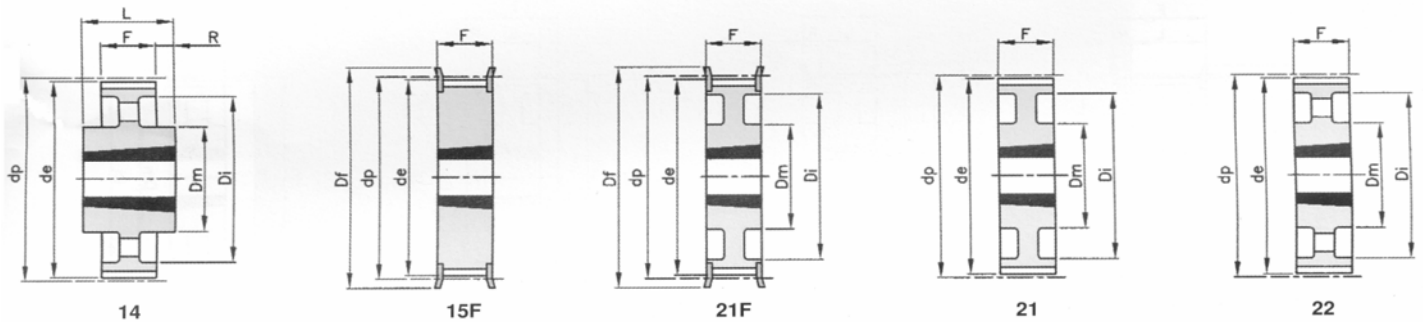


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 L 075	15F	St.	18	1108	54,57	53,81	60	44		25,0	25,0		0,25
TL 19 L 075	15F	St.	19	1108	57,61	56,84	63	44		25,0	25,0		0,32
TL 20 L 075	15F	St.	20	1108	60,64	59,88	66	48		25,0	25,0		0,35
TL 21 L 075	15F	St.	21	1108	63,67	62,91	71	48		25,0	25,0		0,40
TL 22 L 075	15F	St.	22	1108	66,70	65,94	75	51		25,0	25,0		0,44
TL 23 L 075	15F	St.	23	1108	69,73	68,97	79	54		25,0	25,0		0,48
TL 24 L 075	15F	St.	24	1108	72,77	72,00	79	54		25,0	25,0		0,55
TL 25 L 075	15F	St.	25	1108	75,80	75,04	83	56		25,0	25,0		0,63
TL 25 L 075	15F	St.	26	1108	78,83	78,07	87	60		25,0	25,0		0,66
TL 26 L 075	15F	St.	27	1108	81,86	81,10	87	62		25,0	25,0		0,70
TL 27 L 075	15F	St.	28	1108	84,89	84,13	91	65		25,0	25,0		0,72
TL 30 L 075	15F	St.	30	1108	90,96	90,20	97	70		25,0	25,0		0,93
TL 32 L 075	15F	St.	32	1108	97,02	96,26	103	74		25,0	25,0		1,10
TL 36 L 075	15F	St.	36	1610	109,15	108,39	115	85		25,0	25,0		1,20
TL 40 L 075	15F	St.	40	1610	121,28	120,51	127	97		25,0	25,0		1,70
TL 48 L 075	21F	St.	48	1610	145,53	144,77	152	88	120	25,0	25,0		2,60
TL 60 L 075	21	St.	60	1610	181,91	181,15		92	166	25,0	25,0		3,00
TL 72 L 075	22	GG	72	1610	218,30	217,53		92	202	25,0	25,0		2,33
TL 84 L 075	14	GG	84	2012	254,68	253,90		92	236	25,0	32,0	3,5	3,55
TL 96 L 075	14	GG	96	2012	291,06	290,30		106	270	25,0	32,0	3,5	3,95
TL 120 L 075	14	GG	120	2012	363,83	363,07		106	343	25,0	32,0	3,5	5,61



# Taper - Zahnriemenscheiben L 100

Teilung 3/8" (9,525 mm) - Riemenbreite 1" (25,4 mm)

**Antriebstechnik**  
Ketten für Antrieb und Förderung

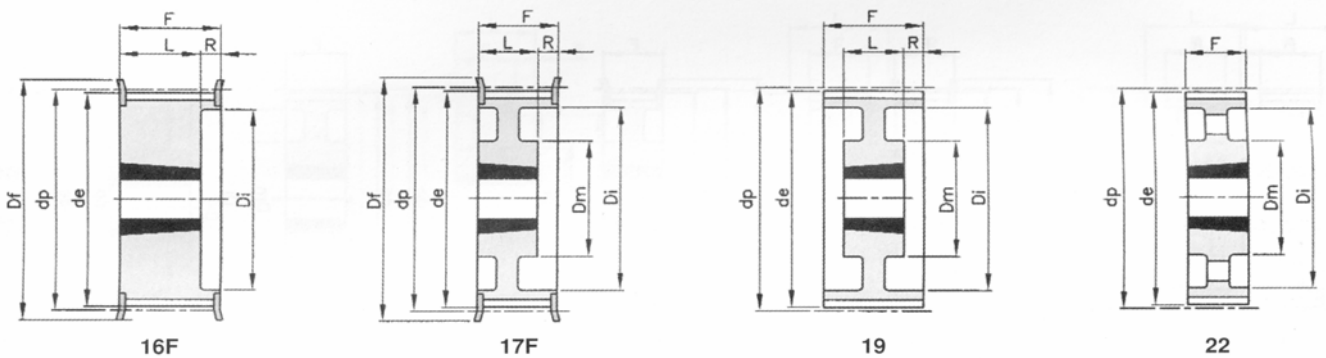


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 L 100	16F	St.	18	1108	54,57	53,81	60		38	31,0	22,0	9,0	0,20
TL 19 L 100	16F	St.	19	1108	57,61	56,84	63		38	31,0	22,0	9,0	0,32
TL 20 L 100	16F	St.	20	1108	60,64	59,88	66		45	31,0	22,0	9,0	0,41
TL 21 L 100	16F	St.	21	1108	63,67	62,91	71		45	31,0	22,0	9,0	0,45
TL 22 L 100	16F	St.	22	1108	66,70	65,94	75		48	31,0	22,0	9,0	0,47
TL 23 L 100	16F	St.	23	1108	69,73	68,97	79		52	32,0	22,0	10,0	0,50
TL 24 L 100	16F	St.	24	1108	72,77	72,00	79		52	32,0	22,0	10,0	0,64
TL 25 L 100	16F	St.	25	1108	75,80	75,04	83		54	32,0	22,0	10,0	0,68
TL 26 L 100	16F	St.	26	1108	78,83	78,07	87		60	32,0	22,0	10,0	0,70
TL 27 L 100	16F	St.	27	1108	81,86	81,10	87		60	32,0	22,0	10,0	0,83
TL 28 L 100	16F	St.	28	1108	84,89	84,13	91		65	32,0	22,0	10,0	0,85
TL 30 L 100	16F	St.	30	1210	90,96	90,20	97		71	32,0	25,0	7,0	0,90
TL 32 L 100	16F	St.	32	1210	97,02	96,26	103		75	32,0	25,0	7,0	1,05
TL 36 L 100	16F	St.	36	1610	109,15	108,39	115		86	32,0	25,0	7,0	1,40
TL 40 L 100	16F	St.	40	1610	121,28	120,51	127		96	32,0	25,0	7,0	1,65
TL 48 L 100	17F	St.	48	1610	145,53	144,77	152		120	32,0	25,0	7,0	2,80
TL 60 L 100	19	St.	60	1610	181,91	181,15		92	166	32,0	25,0	3,5	2,70
TL 72 L 100	22	GG	72	2012	218,30	217,53		92	202	32,0	32,0		2,96
TL 84 L 100	22	GG	84	2012	254,68	253,90		106	236	32,0	32,0		3,87
TL 96 L 100	22	GG	96	2012	291,06	290,30		106	270	32,0	32,0		4,64
TL 120 L 100	22	GG	120	2012	363,83	363,07		106	343	32,0	32,0		6,37

# Taper - Zahnriemenscheiben H 100

Teilung 1/2" (12,7 mm) - Riemenbreite 1" (25,4 mm)



**Antriebstechnik**  
Ketten für Antrieb und Förderung

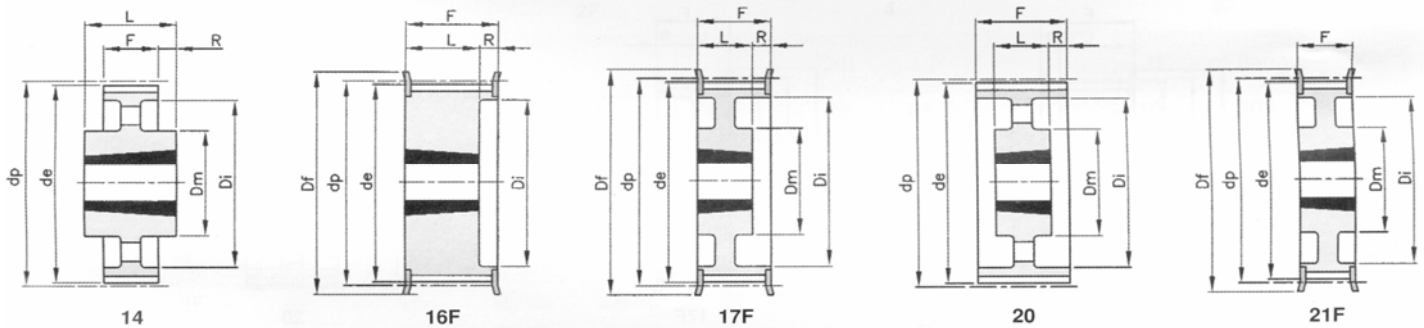




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 16 H 100	16F	ST	16	1108	64,68	63,31	71		45,0	31,0	22,0	9,0	0,42
TL 18 H 100	16F	ST	18	1210	72,77	73,39	79		52,0	31,0	25,0	6,0	0,49
TL 19 H 100	16F	ST	19	1210	76,81	75,44	83		56,0	31,0	25,0	6,0	0,62
TL 20 H 100	16F	ST	20	1210	80,85	79,48	87		60,0	31,0	25,0	6,0	0,73
TL 21 H 100	16F	ST	21	1210	84,89	83,52	91		64,0	32,0	25,0	7,0	0,80
TL 22 H 100	16F	ST	22	1210	88,94	87,56	93		67,0	32,0	25,0	7,0	0,94
TL 23 H 100	16F	ST	23	1610	92,98	91,61	97		70,0	32,0	25,0	7,0	0,97
TL 24 H 100	16F	ST	24	1610	97,02	95,65	103		73,5	32,0	25,0	7,0	1,05
TL 25 H 100	16F	ST	25	1610	101,06	99,69	106		77,0	32,0	25,0	7,0	1,10
TL 26 H 100	16F	ST	26	1610	105,11	103,73	111		82,0	32,0	25,0	7,0	1,20
TL 27 H 100	16F	ST	27	1610	109,15	107,78	115		85,0	32,0	25,0	7,0	1,35
TL 28 H 100	16F	ST	28	1610	113,19	111,82	119		90,5	32,0	25,0	7,0	1,50
TL 30 H 100	16F	ST	30	1610	121,28	119,90	127		98,0	32,0	25,0	7,0	1,78
TL 32 H 100	17F	ST	32	1610	129,36	127,99	135	90	106	32,0	25,0	7,0	2,05
TL 36 H 100	17F	ST	36	1610	145,53	144,16	152	92	121	32,0	25,0	7,0	2,80
TL 40 H 100	17F	ST	40	1610	161,70	160,33	168	92	138	32,0	25,0	7,0	3,65
TL 44 H 100	21F	ST	44	2012	177,87	176,50	184	106	152	32,0	32,0		3,86
TL 48 H 100	21F	ST	48	2012	194,04	192,67	200	106	169	32,0	32,0		4,20
TL 60 H 100	20	GG	60	2012	242,55	241,18		106	223	34,0	32,0	1,0	3,76
TL 72 H 100	20	GG	72	2012	291,06	289,69		106	270	34,0	32,0	1,0	4,88
TL 84 H 100	20	GG	84	2012	339,57	338,20		106	318	34,0	32,0	1,0	6,12
TL 96 H 100	14	GG	96	2517	388,08	386,71		119	366	34,0	45,0	5,5	7,95
TL 120 H 100	14	GG	120	2517	485,10	483,73		119	462	34,0	45,0	5,5	10,05




# Taper - Zahnriemenscheiben H 150

Teilung 1/2" (12,7 mm) - Riemenbreite 1 1/2" (38,1 mm)

**Antriebstechnik**  
Ketten für Antrieb und Förderung

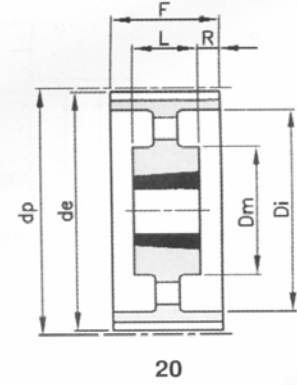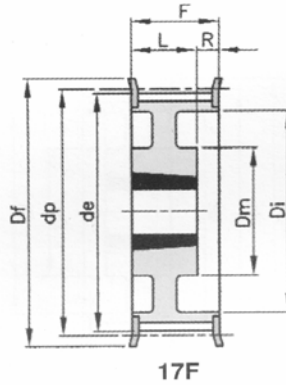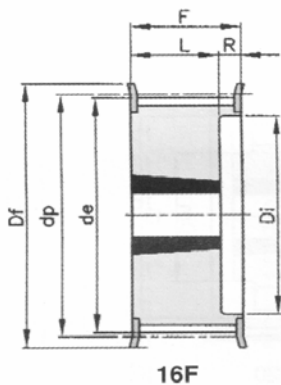




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 H 150	16F	ST	18	1210	72,77	71,39	79		52,0	45,0	25,0	20,0	0,60
TL 19 H 150	16F	ST	19	1210	76,81	75,44	83		56,0	45,0	25,0	20,0	0,72
TL 20 H 150	16F	ST	20	1210	80,85	79,48	87		60,0	45,0	25,0	20,0	0,83
TL 21 H 150	16F	ST	21	1210	84,89	83,52	91		64,0	45,0	25,0	20,0	1,00
TL 22 H 150	16F	ST	22	1210	88,94	87,56	93		67,0	45,0	25,0	20,0	1,25
TL 23 H 150	16F	ST	23	1610	92,98	91,61	97		70,0	45,0	25,0	20,0	1,05
TL 24 H 150	16F	ST	24	1610	97,02	95,65	103		73,5	45,0	25,0	20,0	1,10
TL 25 H 150	16F	ST	25	1610	101,06	99,69	106		77,0	45,0	25,0	20,0	1,30
TL 26 H 150	16F	ST	26	1610	105,11	103,73	111		82,0	45,0	25,0	20,0	1,42
TL 27 H 150	16F	ST	27	1610	109,15	107,78	115		85,0	45,0	25,0	20,0	1,65
TL 28 H 150	16F	ST	28	1610	113,19	111,82	119		90,5	45,0	25,0	20,0	1,88
TL 30 H 150	16F	ST	30	1610	121,28	119,90	127		98,0	45,0	25,0	20,0	2,05
TL 32 H 150	17F	St	32	1610	129,36	127,99	135	90	106	45,0	25,0	20,0	2,35
TL 36 H 150	17F	ST	36	1610	145,53	144,16	152	92	121	45,0	25,0	20,0	3,20
TL 40 H 150	17F	ST	40	1610	161,70	160,33	168	92	138	45,0	25,0	20,0	4,10
TL 44 H 150	17F	ST	44	2012	177,87	176,50	184	106	152	45,0	32,0	13,0	4,50
TL 48 H 150	17F	ST	48	2012	194,04	192,67	200	106	169	45,0	32,0	13,0	4,80
TL 60 H 150	20	GG	60	2012	242,55	241,18		106	223	46,0	32,0	7,0	4,51
TL 72 H 150	20	GG	72	2012	291,06	289,69		106	270	46,0	32,0	7,0	6,16
TL 84 H 150	20	GG	84	2012	339,57	338,20		106	320	46,0	32,0	7,0	7,40
TL 96 H 150	20	GG	96	2517	388,08	386,71		119	366	46,0	45,0	0,5	9,87
TL 120 H 150	20	GG	120	2517	485,10	483,73		119	462	46,0	45,0	0,5	13,50



**Antriebstechnik**  
Ketten für Antrieb und Förderung

# Taper - Zahnriemenscheiben H 200

Teilung 1/2" (12,7 mm) - Riemenbreite 2" (50,8 mm)

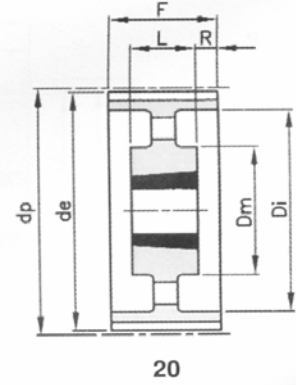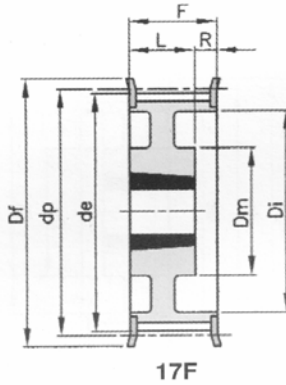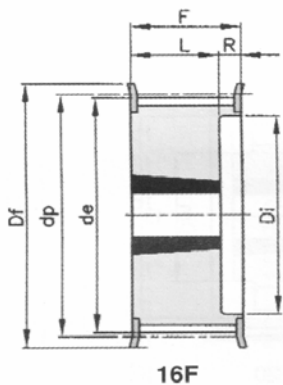




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 H 200	16F	ST	18	1210	72,77	71,39	79		52,0	58,0	25,0	33,0	0,84
TL 19 H 200	16F	ST	19	1210	76,81	75,44	83		56,0	58,0	25,0	33,0	0,96
TL 20 H 200	16F	ST	20	1610	80,85	79,48	87		60,0	58,0	25,0	33,0	0,93
TL 21 H 200	16F	ST	21	1610	84,89	83,52	91		64,0	58,0	25,0	33,0	1,07
TL 22 H 200	16F	ST	22	1610	88,94	87,56	93		67,0	58,0	25,0	33,0	1,25
TL 23 H 200	16F	ST	23	1610	92,98	91,61	97		70,0	58,0	25,0	33,0	1,40
TL 24 H 200	16F	ST	24	1610	97,02	95,65	103		73,5	58,0	25,0	33,0	1,55
TL 25 H 200	16F	ST	25	1610	101,06	99,69	106		77,0	58,0	25,0	33,0	1,71
TL 26 H 200	16F	ST	26	1610	105,11	103,73	111		82,0	58,0	25,0	33,0	1,84
TL 27 H 200	16F	ST	27	1610	109,15	107,78	115		85,0	58,0	25,0	33,0	2,06
TL 28 H 200	16F	ST	28	1610	113,19	111,82	119		90,5	58,0	25,0	33,0	2,17
TL 30 H 200	16F	ST	30	1610	121,28	119,90	127		98,0	58,0	25,0	33,0	2,60
TL 32 H 200	16F	ST	32	2012	129,36	127,99	135		106	58,0	32,0	26,0	2,95
TL 36 H 200	17F	ST	36	2012	145,53	144,16	152	102	121	58,0	32,0	26,0	3,62
TL 40 H 200	17F	ST	40	2012	161,70	160,33	168	106	138	58,0	32,0	26,0	4,33
TL 44 H 200	17F	ST	44	2012	177,87	176,50	184	106	152	58,0	32,0	26,0	5,33
TL 48 H 200	17F	ST	48	2517	194,04	192,67	200	119	169	58,0	45,0	13,0	6,47
TL 60 H 200	20	GG	60	2517	242,55	241,18		119	223	60,0	45,0	7,5	5,86
TL 72 H 200	20	GG	72	2517	291,06	289,69		119	270	60,0	45,0	7,5	7,42
TL 84 H 200	20	GG	84	2517	339,57	338,20		119	320	60,0	45,0	7,5	8,73
TL 96 H 200	20	GG	96	2517	388,08	386,71		119	366	60,0	45,0	7,5	10,83
TL 120 H 200	20	GG	120	2517	485,10	483,73		119	462	60,0	45,0	7,5	14,95



**Antriebstechnik**  
Ketten für Antrieb und Förderung

## Taper - Zahnriemenscheiben H 300


Teilung 1/2" (12,7 mm) - Riemenbreite 3" (76,2 mm)

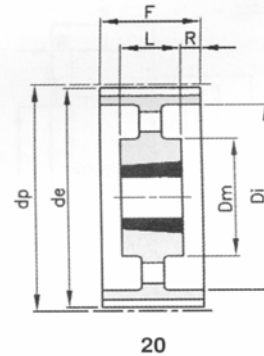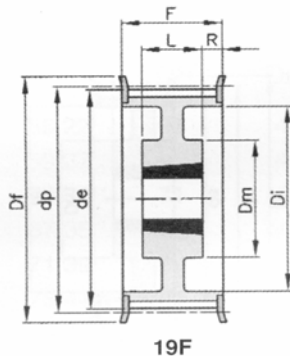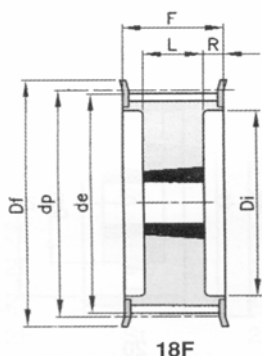

Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 20 H 300	18F	ST	20	1615	80,85	79,48	87		64,5	84,0	38,0	23,0	1,22
TL 21 H 300	18F	ST	21	1615	84,89	83,52	91		65,0	84,0	38,0	23,0	1,52
TL 22 H 200	18F	ST	22	1615	88,94	87,56	93		67,0	84,0	38,0	23,0	1,80
TL 23 H 300	18F	ST	23	1615	92,98	91,61	97		70,0	84,0	38,0	23,0	2,04
TL 24 H 300	18F	ST	24	1615	97,02	95,65	103		73,5	84,0	38,0	23,0	2,29
TL 25 H 300	18F	ST	25	1615	101,06	99,69	106		77,0	84,0	38,0	23,0	2,54
TL 26 H 300	18F	ST	26	1615	105,11	103,73	111		82,0	84,0	38,0	23,0	2,73
TL 27 H 300	18F	ST	27	2012	109,15	107,78	115		85,0	84,0	32,0	26,0	2,54
TL 28 H 300	18F	ST	28	2012	113,19	111,82	119		90,5	84,0	32,0	26,0	2,68
TL 30 H 300	18F	ST	30	2012	121,28	119,90	127		98,0	84,0	32,0	26,0	3,21
TL 32 H 300	18F	ST	32	2517	129,36	127,99	135		106	84,0	45,0	19,5	3,58
TL 36 H 300	18F	ST	36	2517	145,53	144,16	152		121	84,0	45,0	19,5	4,99
TL 40 H 300	18F	ST	40	2517	161,70	160,33	168		138	84,0	45,0	19,5	6,50
TL44 H 300	19F	ST	44	2517	177,87	176,50	184	119	152	86,0	45,0	20,5	7,55
TL 48 H 300	19F	ST	48	2517	194,04	192,67	200	119	169	86,0	45,0	20,5	8,66
TL 60 H 300	20	GG	60	2517	242,55	241,18		119	223	86,0	45,0	20,5	7,42
TL 72 H 300	20	GG	72	2517	291,06	289,69		119	270	86,0	45,0	20,5	9,33
TL 84 H 300	20	GG	84	2517	339,57	338,20		119	320	86,0	45,0	20,5	11,19
TL 96 H 300	20	GG	96	3030	388,08	386,71		150	362	86,0	76,0	5,0	17,96
TL 120 H 300	20	GG	120	3030	485,10	483,73		150	460	86,0	76,0	5,0	22,23

## Zahnriemenscheiben HTD - 3M

Teilung 3 mm - Riemenbreite 9 mm

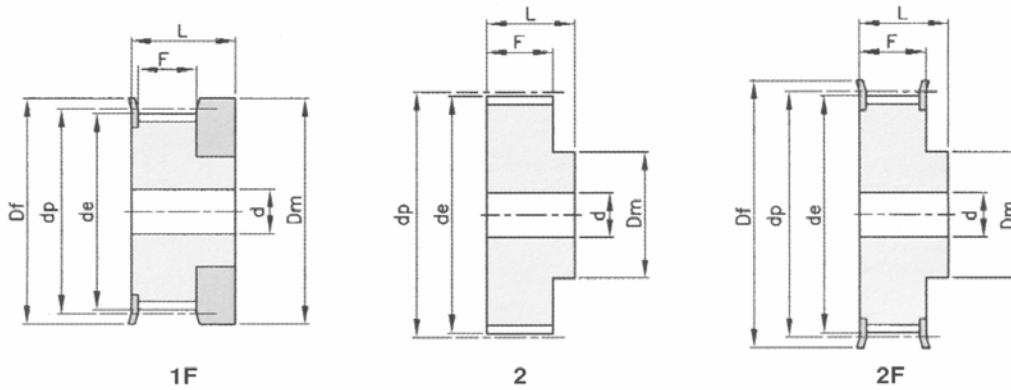


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 3M 09	1F	Al	10	9,55	8,79	13,0	12,0	10,2	17,5		0,01
12 3M 09	1F	Al	12	11,46	10,70	15,0	15,0	10,2	17,5		0,01
14 3M 09	1F	Al	14	13,37	12,61	16,0	16,0	10,2	17,5		0,01
15 3M 09	1F	Al	15	14,32	13,56	18,0	17,5	10,2	17,5		0,01
16 3M 09	2F	Al	16	15,28	14,52	18,0	10,0	12,8	20,6	4,0	0,01
18 3M 09	2F	Al	18	17,19	16,43	19,5	11,0	12,8	20,6	6,0	0,01
20 3M 09	2F	Al	20	19,10	18,34	23,0	13,0	12,8	20,6	6,0	0,01
21 3M 09	2F	Al	21	20,05	19,29	25,0	14,0	12,8	20,6	6,0	0,01
22 3M 09	2F	Al	22	21,01	20,25	25,0	14,0	12,8	20,6	6,0	0,01
24 3M 09	2F	Al	24	22,92	22,16	25,0	14,0	12,8	20,6	6,0	0,02
26 3M 09	2F	Al	26	24,83	24,07	28,0	16,0	12,8	20,6	6,0	0,02
28 3M 09	2F	Al	28	26,74	25,98	32,0	18,0	12,8	20,6	6,0	0,02
30 3M 09	2F	Al	30	28,65	27,89	32,0	20,0	12,8	20,6	6,0	0,03
32 3M 09	2F	Al	32	30,56	29,80	36,0	22,0	12,8	20,6	6,0	0,03
36 3M 09	2F	Al	36	34,38	33,62	38,0	26,0	13,4	22,2	6,0	0,05
40 3M 09	2F	Al	40	38,20	37,44	42,0	28,0	13,4	22,2	6,0	0,06
44 3M 09	2F	Al	44	42,02	41,26	48,0	33,0	13,4	22,2	6,0	0,07
48 3M 09	2	Al	48	45,84	45,08		33,0	13,4	22,2	8,0	0,11
60 3M 09	2	Al	60	57,30	56,54		33,0	13,4	22,2	8,0	0,11
72 3M 09	2	Al	72	68,76	68,00		33,0	13,4	22,2	8,0	0,15

# Zahnriemenscheiben HTD - 3M

Teilung 3 mm - Riemenbreite 15 mm


**Antriebstechnik**  
Ketten für Antrieb und Förderung

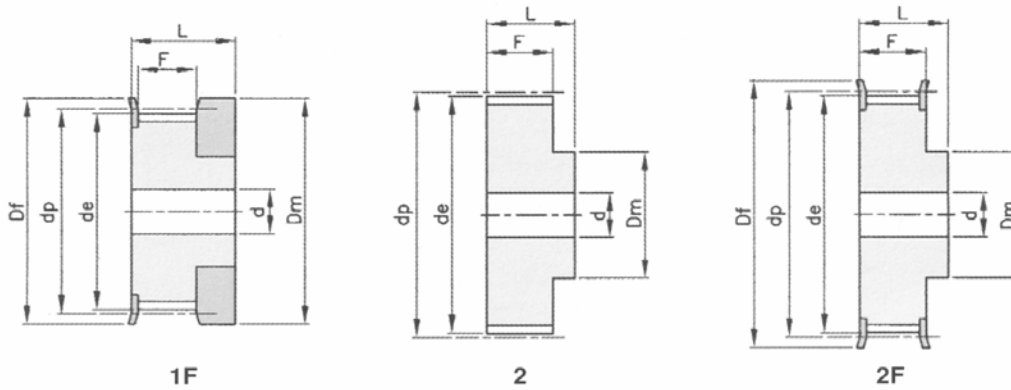

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 3M 15	1F	Al	10	9,55	8,79	13,0	12,0	17,0	26,0		0,01
12 3M 15	1F	Al	12	11,46	10,70	15,0	15,0	17,0	26,0		0,01
14 3M 15	1F	Al	14	13,37	12,61	16,0	16,0	17,0	26,0		0,01
15 3M 15	1F	Al	15	14,32	13,56	18,0	17,5	17,0	26,0		0,01
16 3M 15	2F	Al	16	15,28	14,52	18,0	10,0	19,5	26,0	4,0	0,01
18 3M 15	2F	Al	18	17,19	16,43	19,5	11,0	19,5	26,0	6,0	0,01
20 3M 15	2F	Al	20	19,10	18,34	23,0	13,0	19,5	26,0	6,0	0,01
21 3M 15	2F	Al	21	20,05	19,29	25,0	14,0	19,5	26,0	6,0	0,01
22 3M 15	2F	Al	22	21,01	20,25	25,0	14,0	19,5	26,0	6,0	0,01
24 3M 15	2F	Al	24	22,92	22,16	25,0	14,0	19,5	26,0	6,0	0,02
26 3M 15	2F	Al	26	24,83	24,07	28,0	16,0	19,5	26,0	6,0	0,02
28 3M 15	2F	Al	28	26,74	25,98	32,0	18,0	19,5	26,0	6,0	0,02
30 3M 15	2F	Al	30	28,65	27,89	32,0	20,0	19,5	26,0	6,0	0,03
32 3M 15	2F	Al	32	30,56	29,80	36,0	22,0	19,5	26,0	6,0	0,03
36 3M 15	2F	Al	36	34,38	33,62	38,0	26,0	20,0	30,0	6,0	0,05
40 3M 15	2F	Al	40	38,20	37,44	42,0	28,0	20,0	30,0	6,0	0,06
44 3M 15	2F	Al	44	42,02	41,26	48,0	33,0	20,0	30,0	6,0	0,07
48 3M 15	2	Al	48	45,84	45,08		33,0	20,0	30,0	8,0	0,11
60 3M 15	2	Al	60	57,30	56,54		33,0	20,0	30,0	8,0	0,11
72 3M 15	2	Al	72	68,76	68,00		33,0	20,0	30,0	8,0	0,15

## Zahnriemenscheiben HTD - 5M


Teilung 5 mm - Riemenbreite 9 mm

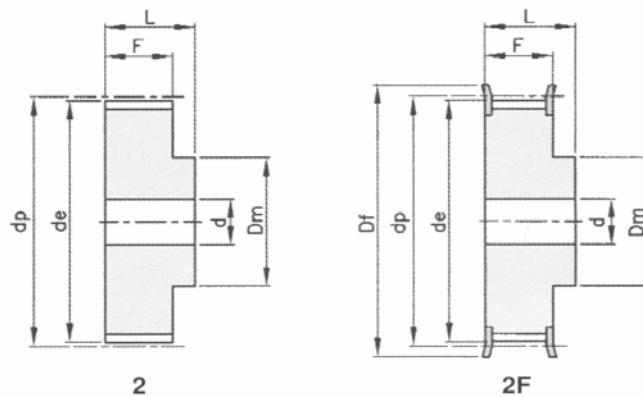

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
12 5M 09	2F	ST	12	19,10	17,96	23,0	12,5	14,5	20,0	6,0	0,03
14 5M 09	2F	ST	14	22,28	21,14	25,0	13,5	14,5	20,0	6,0	0,04
15 5M 09	2F	ST	15	23,87	22,73	28,0	16,0	14,5	20,0	6,0	0,05
16 5M 09	2F	ST	16	25,46	24,32	28,0	16,5	14,5	20,0	6,0	0,06
18 5M 09	2F	ST	18	28,65	27,51	32,0	20,0	14,5	20,0	6,0	0,07
20 5M 09	2F	ST	20	31,83	30,69	36,0	23,0	14,5	22,5	6,0	0,10
21 5M 09	2F	ST	21	33,42	32,28	38,0	24,0	14,5	22,5	6,0	0,12
22 5M 09	2F	ST	22	35,01	33,87	38,0	25,5	14,5	22,5	6,0	0,13
24 5M 09	2F	ST	24	38,20	37,06	42,0	27,0	14,5	22,5	6,0	0,15
26 5M 09	2F	ST	26	41,38	40,24	44,0	30,0	14,5	22,5	6,0	0,18
28 5M 09	2F	ST	28	44,56	43,42	48,0	30,5	14,5	22,5	6,0	0,21
30 5M 09	2F	ST	30	47,75	46,60	51,0	35,0	14,5	22,5	6,0	0,25
32 5M 09	2F	ST	32	50,93	49,79	54,0	38,0	14,5	22,5	8,0	0,28
36 5M 09	2F	ST	36	57,30	56,16	60,0	38,0	14,5	22,5	8,0	0,33
40 5M 09	2F	ST	40	63,66	62,52	71,0	38,0	14,5	22,5	8,0	0,42
44 5M 09	2	Al	44	70,03	68,89		38,0	14,5	25,5	8,0	0,17
48 5M 09	2	Al	48	76,39	75,25		45,0	14,5	25,5	8,0	0,18
60 5M 09	2	Al	60	95,49	94,35		45,0	14,5	25,5	8,0	0,23
72 5M 09	2	Al	72	114,59	113,45		45,0	14,5	25,5	8,0	

## Zahnriemenscheiben HTD - 5M


Teilung 5 mm - Riemenbreite 15 mm

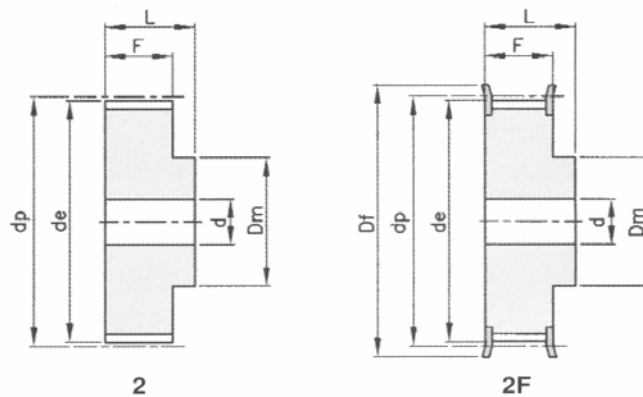

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
12 5M 15	2F	ST	12	19,10	17,96	23,0	12,5	20,5	26,0	6,0	0,03
14 5M 15	2F	ST	14	22,28	21,14	25,0	13,5	20,5	26,0	6,0	0,04
15 5M 15	2F	ST	15	23,87	22,73	28,0	16,0	20,5	26,0	6,0	0,05
16 5M 15	2F	ST	16	25,46	24,32	28,0	16,5	20,5	26,0	6,0	0,06
18 5M 15	2F	ST	18	28,65	27,51	32,0	20,0	20,5	26,0	6,0	0,09
20 5M 15	2F	ST	20	31,83	30,69	36,0	23,0	20,5	26,0	6,0	0,12
21 5M 15	2F	ST	21	33,42	32,28	38,0	24,0	20,5	26,0	6,0	0,14
22 5M 15	2F	ST	22	35,01	33,87	38,0	25,5	20,5	26,0	6,0	0,15
24 5M 15	2F	ST	24	38,20	37,06	42,0	27,0	20,5	28,0	6,0	0,19
26 5M 15	2F	ST	26	41,38	40,24	44,0	30,0	20,5	28,0	6,0	0,23
28 5M 15	2F	ST	28	44,56	43,42	48,0	30,5	20,5	28,0	6,0	0,26
30 5M 15	2F	ST	30	47,75	46,60	51,0	35,0	20,5	28,0	6,0	0,32
32 5M 15	2F	ST	32	50,93	49,79	54,0	38,0	20,5	28,0	8,0	0,35
36 5M 15	2F	ST	36	57,30	56,16	60,0	38,0	20,5	28,0	8,0	0,43
40 5M 15	2F	ST	40	63,66	62,52	71,0	38,0	20,5	28,0	8,0	0,52
44 5M 15	2	Al	44	70,03	68,89		38,0	20,5	30,0	8,0	0,23
48 5M 15	2	Al	48	76,39	75,25		38,0	20,5	30,0	8,0	0,29
60 5M 15	2	Al	60	95,49	94,35		50,0	20,5	30,0	8,0	0,3
72 5M 15	2	Al	72	114,59	113,45		50,0	20,5	30,0	8,0	0,59

# Zahnriemenscheiben HTD - 5M

Teilung 5 mm - Riemenbreite 25 mm

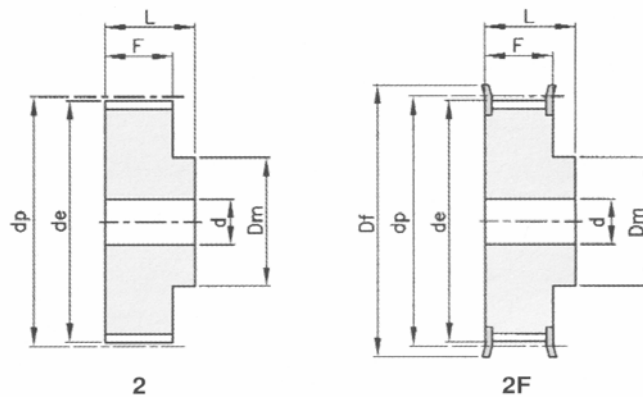


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
12 5M 25	2F	ST	12	19,10	17,96	23,0	12,5	30,5	36,0	6,0	0,05
14 5M 25	2F	ST	14	22,28	21,14	25,0	13,5	30,5	36,0	6,0	0,08
15 5M 25	2F	ST	15	23,87	22,73	28,0	16,0	30,5	36,0	6,0	0,09
16 5M 25	2F	ST	16	25,46	24,32	28,0	16,5	30,5	36,0	6,0	0,11
18 5M 25	2F	ST	18	28,65	27,51	32,0	20,0	30,5	36,0	6,0	0,13
20 5M 25	2F	ST	20	31,83	30,69	36,0	23,0	30,5	36,0	6,0	0,17
21 5M 25	2F	ST	21	33,42	32,28	38,0	24,0	30,5	38,0	6,0	0,20
22 5M 25	2F	ST	22	35,01	33,87	38,0	25,5	30,5	38,0	6,0	0,22
24 5M 25	2F	ST	24	38,20	37,06	42,0	27,0	30,5	38,0	6,0	0,26
26 5M 25	2F	ST	26	41,38	40,24	44,0	30,0	30,5	38,0	6,0	0,32
28 5M 25	2F	ST	28	44,56	43,42	48,0	30,5	30,5	38,0	6,0	0,37
30 5M 25	2F	ST	30	47,75	46,60	51,0	35,0	30,5	38,0	6,0	0,44
32 5M 25	2F	ST	32	50,93	49,79	54,0	38,0	30,5	38,0	8,0	0,48
36 5M 25	2F	ST	36	57,30	56,16	60,0	38,0	30,5	38,0	8,0	0,59
40 5M 25	2F	ST	40	63,66	62,52	71,0	38,0	30,5	38,0	8,0	0,75
44 5M 25	2	Al	44	70,03	68,89		38,0	30,5	40,0	8,0	0,32
48 5M 25	2	Al	48	76,39	75,25		38,0	30,5	40,0	8,0	0,28
60 5M 25	2	Al	60	95,49	94,35		50,0	30,5	40,0	8,0	0,44
72 5M 25	2	Al	72	114,59	113,45		50,0	30,5	40,0	8,0	0,85



# Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 20 mm

**Antriebstechnik**  
Ketten für Antrieb und Förderung

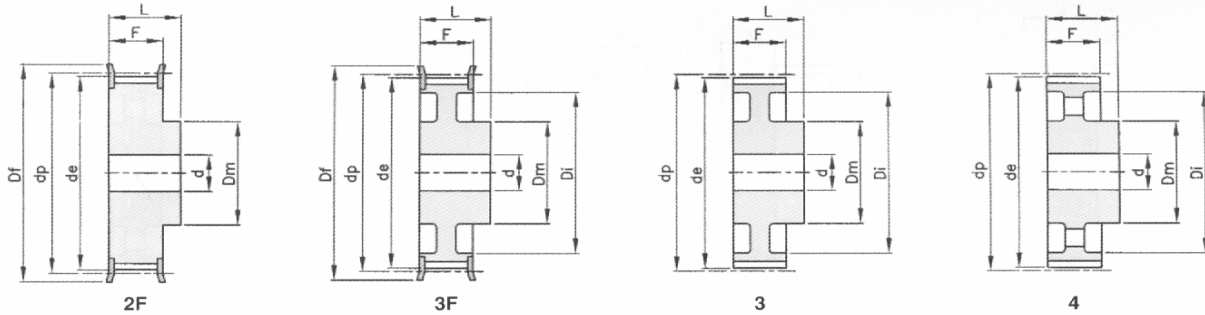


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
22 8M 20	2F	ST	22	56,02	54,65	60	43,0		38,0	12	0,54
24 8M 20	2F	ST	24	61,11	59,74	66	45,0		38,0	12	0,65
26 8M 20	2F	ST	26	66,21	64,84	71	48,0		38,0	12	0,80
28 8M 20	2F	ST	28	71,30	70,08	75	50,0		38,0	14	0,88
30 8M 20	2F	ST	30	76,39	75,13	83	55,0		38,0	14	1,00
32 8M 20	2F	ST	32	81,49	80,16	87	60,0		38,0	14	1,20
34 8M 20	2F	ST	34	86,58	85,21	91	66,0		38,0	14	1,40
36 8M 20	2F	ST	36	91,67	90,30	98	70,0		38,0	14	1,60
38 8M 20	2F	ST	38	96,77	95,39	103	75,0		38,0	14	1,70
40 8M 20	2F	ST	40	101,86	100,49	106	75,0		38,0	14	1,85
44 8M 20	2F	ST	44	112,05	110,67	119	75,0		38,0	14	2,10
48 8M 20	2F	ST	48	122,23	120,86	127	75,0		38,0	14	2,50
56 8M 20	3F	ST	56	142,60	141,23	148	80,0	116	38,0	14	2,82
64 8M 20	3F	ST	64	162,97	161,60	168	80,0	137	38,0	14	3,22
72 8M 20	3F	ST	72	183,35	181,97	192	80,0	158	38,0	14	3,74
80 8M 20	3	GG	80	203,72	202,35		90,0	180	38,0	14	3,78
90 8M 20	3	GG	90	229,18	227,81		90,0	204	38,0	14	4,57
112 8M 20	4	GG	112	285,21	283,83		90,0	254	38,0	18	
144 8M 20	4	GG	144	366,69	365,32		90,0	336	38,0	20	
168 8M 20	4	GG	168	427,81	426,44		100	400	38,0	20	
192 8M 20	4	GG	192	488,92	487,55		100	460	38,0	20	

# Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 30 mm


**Antriebstechnik**  
Ketten für Antrieb und Förderung

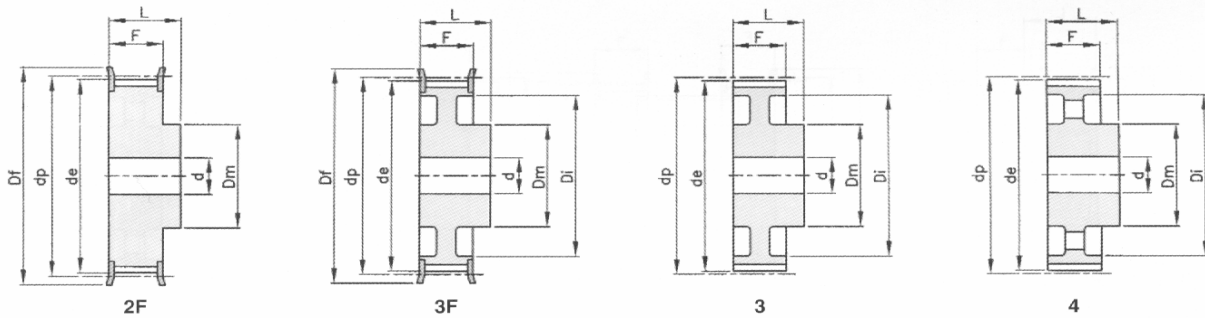

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
22 8M 30	2F	ST	22	56,02	54,65	60,0	43,0	38,0	48,0	12	0,75
24 8M 30	2F	ST	24	61,11	59,74	66,0	45,0	38,0	48,0	12	0,9
26 8M 30	2F	ST	26	66,21	64,84	71,0	48,0	38,0	48,0	12	1,1
28 8M 30	2F	ST	28	71,30	70,08	75,0	50,0	38,0	48,0	14	1,2
30 8M 30	2F	ST	30	76,39	75,13	83,0	55,0	38,0	48,0	14	1,32
32 8M 30	2F	ST	32	81,49	80,16	87,0	60,0	38,0	48,0	14	1,55
34 8M 30	2F	ST	34	86,58	85,21	91,0	66,0	38,0	48,0	14	1,8
36 8M 30	2F	ST	36	91,67	90,30	98,0	70,0	38,0	48,0	14	2,1
38 8M 30	2F	ST	38	96,77	95,39	103	75,0	38,0	48,0	14	2,3
40 8M 30	2F	ST	40	101,86	100,49	106	75,0	38,0	48,0	14	2,47
44 8M 30	2F	ST	44	112,05	110,67	119	75,0	38,0	48,0	14	2,95
48 8M 30	2F	ST	48	122,23	120,86	127	75,0	38,0	48,0	14	3,3
56 8M 30	3F	ST	56	142,60	141,23	148	90,0	38,0	48,0	14	4,02
64 8M 30	3F	ST	64	162,97	161,60	168	90,0	38,0	48,0	14	4,6
72 8M 30	3F	ST	72	183,35	181,97	192	95,0	38,0	48,0	14	5,41
80 8M 30	3	GG	80	203,72	202,35		100	38,0	48,0	14	5,23
90 8M 30	3	GG	90	229,18	227,81		100	38,0	48,0	14	6,42
112 8M 30	4	GG	112	285,21	283,83		100	38,0	48,0	18	8,12
144 8M 30	4	GG	144	366,69	365,32		100	38,0	48,0	20	10,36
168 8M 30	4	GG	168	427,81	426,44		100	38,0	48,0	20	12,37
192 8M 30	4	GG	192	488,92	487,55		100	38,0	48,0	20	14,31

# Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 50 mm

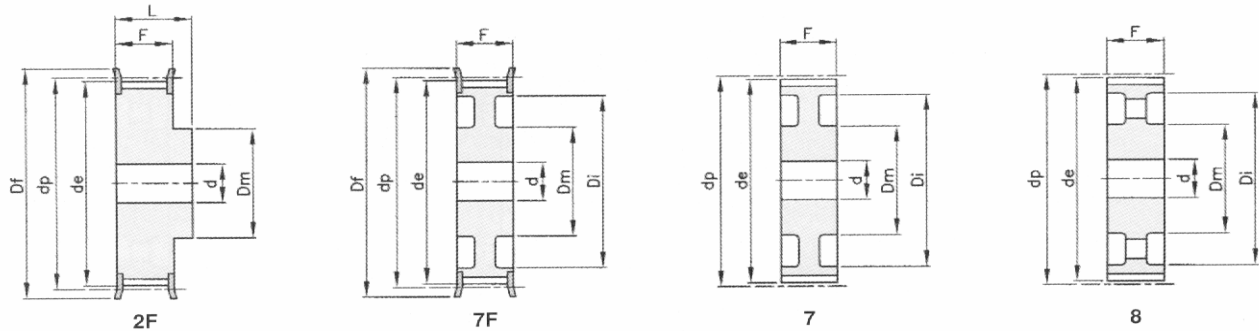


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
22 8M 50	2F	ST	22	56,02	54,65	60,0	43,0	60,0	70,0	12	1,10
24 8M 50	2F	ST	24	61,11	59,74	66,0	45,0	60,0	70,0	12	1,30
26 8M 50	2F	ST	26	66,21	64,84	71,0	48,0	60,0	70,0	12	1,60
28 8M 50	2F	ST	28	71,30	70,08	75,0	50,0	60,0	70,0	14	1,70
30 8M 50	2F	ST	30	76,39	75,13	83,0	55,0	60,0	70,0	14	2,00
32 8M 50	2F	ST	32	81,49	80,16	87,0	60,0	60,0	70,0	14	2,35
34 8M 50	2F	ST	34	86,58	85,21	91,0	66,0	60,0	70,0	14	2,80
36 8M 50	2F	ST	36	91,67	90,30	98,0	70,0	60,0	70,0	14	3,10
38 8M 50	2F	ST	38	96,77	95,39	103	75,0	60,0	70,0	14	3,30
40 8M 50	2F	ST	40	101,86	100,49	106	75,0	60,0	70,0	14	3,60
44 8M 50	2F	ST	44	112,05	110,67	119	75,0	60,0	70,0	14	4,40
48 8M 50	2F	ST	48	122,23	120,86	127	75,0	60,0	70,0	14	5,00
56 8M 50	7F	ST	56	142,60	141,23	148	90,0	60,0	60,0	18	5,68
64 8M 50	7F	ST	64	162,97	161,60	168	100	60,0	60,0	18	6,93
72 8M 50	7F	ST	72	183,35	181,97	192	100	60,0	60,0	18	7,95
80 8M 50	7	GG	80	203,72	202,35		110	60,0	60,0	18	7,96
90 8M 50	7	GG	90	229,18	227,81		110	60,0	60,0	18	9,20
112 8M 50	8	GG	112	285,21	283,83		110	60,0	60,0	18	12,16
144 8M 50	8	GG	144	366,69	365,32		110	60,0	60,0	18	15,68
168 8M 50	8	GG	168	427,81	426,44		120	60,0	60,0	18	18,99
192 8M 50	8	GG	192	488,92	487,55		130	60,0	60,0	18	24,09

# Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 85 mm

**Antriebstechnik**  
Ketten für Antrieb und Förderung

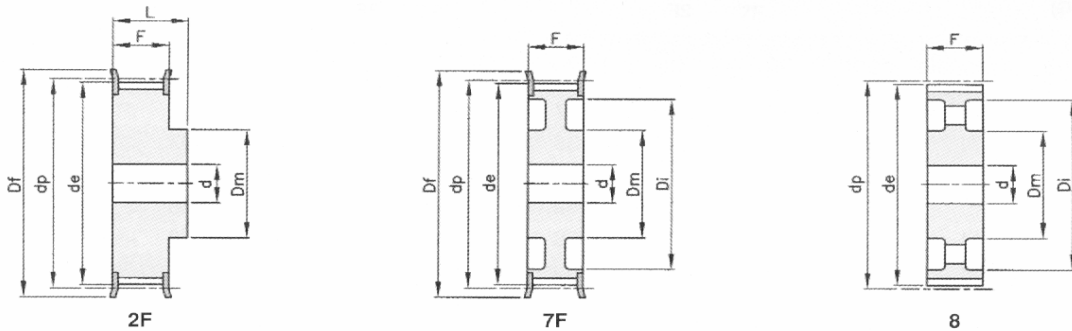


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
22 8M 85	2F	ST	22	56,02	54,65	60,0	43,0	95,0	105	12	1,60
24 8M 85	2F	ST	24	61,11	59,74	66,0	45,0	95,0	105	12	1,95
26 8M 85	2F	ST	26	66,21	64,84	71,0	48,0	95,0	105	12	2,30
28 8M 85	2F	ST	28	71,30	70,08	75,0	50,0	95,0	105	14	2,60
30 8M 85	2F	ST	30	76,39	75,13	83,0	55,0	95,0	105	14	3,10
32 8M 85	2F	ST	32	81,49	80,16	87,0	60,0	95,0	105	14	3,70
34 8M 85	2F	ST	34	86,58	85,21	91,0	66,0	95,0	105	14	4,00
36 8M 85	2F	ST	36	91,67	90,30	98,0	70,0	95,0	105	14	4,70
38 8M 85	2F	ST	38	96,77	95,39	103	75	95,0	105	14	5,10
40 8M 85	2F	ST	40	101,86	100,49	106	75	95,0	105	14	5,40
44 8M 85	2F	ST	44	112,05	110,67	119	75	95,0	105	14	6,70
48 8M 85	2F	ST	48	122,23	120,86	127	75	95,0	105	14	7,20
56 8M 85	2F	ST	56	142,60	141,23	148	80	95,0	105	18	11,48
64 8M 85	7F	ST	64	162,97	161,60	168	100	95,0	95	18	11,02
72 8M 85	2F	ST	72	183,35	181,97	192	110	95,0	95	18	13,45
80 8M 85	8	GG	80	203,72	202,35		110	95,0	95	20	12,36
90 8M 85	8	GG	90	229,18	227,81		110	95,0	95	20	14,38
112 8M 85	8	GG	112	285,21	283,83		110	95,0	95	24	18,66
144 8M 85	8	GG	144	366,69	365,32		110	95,0	95	24	23,00
168 8M 85	8	GG	168	427,81	426,44		120	95,0	95	24	
192 8M 85	8	GG	192	488,92	487,55		130	95,0	95	24	

# Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 40 mm

Antriebstechnik  
Ketten für Antrieb und Förderung



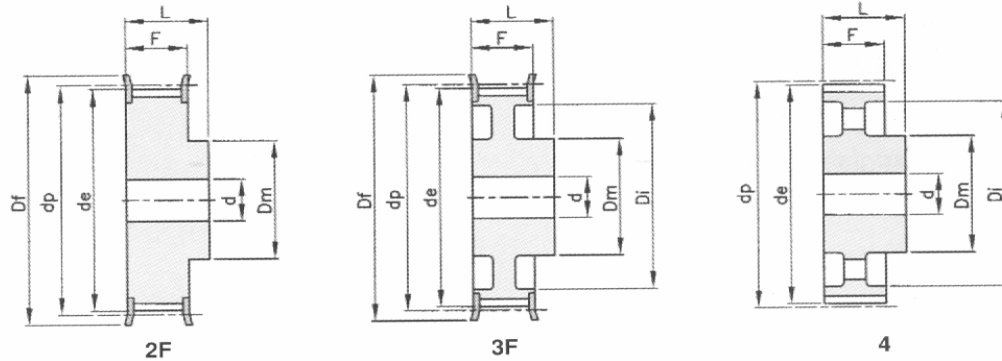


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
28 14M 40	2F	ST	28	124,78	122,12	127	100	54	69,0	24	4,80
30 14M 40	2F	ST	30	133,69	130,99	138	100	54	69,0	24	5,60
32 14M 40	2F	ST	32	142,60	139,88	154	100	54	69,0	24	6,20
34 14M 40	2F	ST	34	151,52	148,79	160	100	54	69,0	24	6,90
36 14M 40	2F	ST	36	160,43	157,68	168	100	54	69,0	24	7,70
38 14M 40	2F	ST	38	169,34	166,60	183	120	54	69,0	24	8,90
40 14M 40	2F	ST	40	178,25	175,49	188	120	54	69,0	24	9,80
44 14M 40	2F	ST	44	196,08	193,28	211	120	54	69,0	24	12,00
48 14M 40	3F	GG	48	213,90	211,11	226	135	54	69,0	24	11,98
56 14M 40	3F	GG	56	249,55	246,76	256	135	54	69,0	28	14,01
64 14M 40	3F	GG	64	285,21	282,41	296	135	54	69,0	28	16,65
72 14M 40	4	GG	72	320,86	318,06		135	54	69,0	28	15,52
80 14M 40	4	GG	80	356,51	353,71		135	54	69,0	28	17,23
90 14M 40	4	GG	90	401,07	398,28		135	54	69,0	28	19,40
112 14M 40	4	GG	112	499,11	496,32		135	54	69,0	28	24,14
144 14M 40	4	GG	144	641,71	638,92		135	54	69,0	28	
168 14M 40	4	GG	168	748,66	745,87		135	54	69,0	28	
192 14M 40	4	GG	192	855,62	852,82		135	54	69,0	28	

# Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 55 mm

**Antriebstechnik**  
Ketten für Antrieb und Förderung




Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
28 14M 55	2F	ST	28	124,78	122,12	127	100	70	85	24	5,70
30 14M 55	2F	ST	30	133,69	130,99	138	100	70	85	24	7,10
32 14M 55	2F	ST	32	142,60	139,88	154	100	70	85	24	7,90
34 14M 55	2F	ST	34	151,52	148,79	160	100	70	85	24	9,33
36 14M 55	2F	ST	36	160,43	157,68	168	100	70	85	24	10,49
38 14M 55	2F	ST	38	169,34	166,60	183	120	70	85	24	12,11
40 14M 55	2F	ST	40	178,25	175,49	188	120	70	85	24	13,30
44 14M 55	2F	ST	44	196,08	193,28	211	120	70	85	24	16,12
48 14M 55	7F	GG	48	213,90	211,11	226	135	70	70	24	13,50
56 14M 55	7F	GG	56	249,55	246,76	256	135	70	70	28	15,78
64 14M 55	7F	GG	64	285,21	282,41	296	135	70	70	28	19,04
72 14M 55	8	GG	72	320,86	318,06		135	70	70	28	18,41
80 14M 55	8	GG	80	356,51	353,71		135	70	70	28	20,27
90 14M 55	8	GG	90	401,07	398,28		135	70	70	28	22,98
112 14M 55	8	GG	112	499,11	496,32		135	70	70	28	29,29
144 14M 55	8	GG	144	641,71	638,92		135	70	70	28	36,00
168 14M 55	8	GG	168	748,66	745,87		135	70	70	28	40,00
192 14M 55	8	GG	192	855,62	852,82		135	70	70	28	47,50

# Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 85 mm

**Antriebstechnik**  
Ketten für Antrieb und Förderung

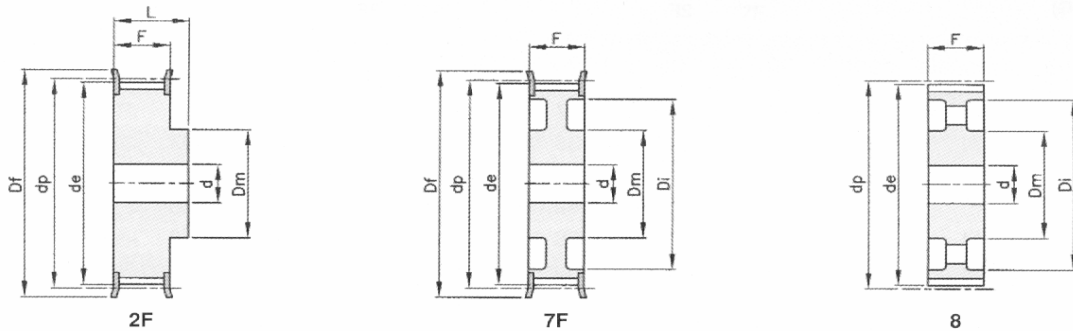


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
28 14M 85	2F	ST	28	124,78	122,12	127	100	102	117	24	8,77
30 14M 85	2F	ST	30	133,69	130,99	138	100	102	117	24	10,13
32 14M 85	2F	ST	32	142,60	139,88	154	100	102	117	24	11,65
34 14M 85	2F	ST	34	151,52	148,79	160	100	102	117	24	13,15
36 14M 85	2F	St	36	160,43	157,68	168	100	102	117	32	14,48
38 14M 85	2F	ST	38	169,34	166,60	183	120	102	117	32	16,62
40 14M 85	2F	ST	40	178,25	175,49	188	135	102	117	32	18,84
44 14M 85	2F	ST	44	196,08	193,28	211	135	102	117	32	22,86
48 14M 85	2F	St	48	213,90	211,11	226	150	102	117	32	27,58
56 14M 85	7F	GG	56	249,55	246,76	256	150	102	102	32	24,19
64 14M 85	7F	GG	64	285,21	282,41	296	150	102	102	32	28,57
72 14M 85	8	GG	72	320,86	318,06		150	102	102	32	28,26
80 14M 85	8	GG	80	356,51	353,71		150	102	102	32	31,00
90 14M 85	8	GG	90	401,07	398,28		150	102	102	32	35,00
112 14M 85	8	GG	112	499,11	496,32		150	102	102	32	43,50
144 14M 85	8	GG	144	641,71	638,92		150	102	102	32	50,00
168 14M 85	8	GG	168	748,66	745,87		150	102	102	32	63,00
192 14M 85	8	GG	192	855,62	852,82		165	102	102	32	76,00

# Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 115 mm

**Antriebstechnik**  
Ketten für Antrieb und Förderung

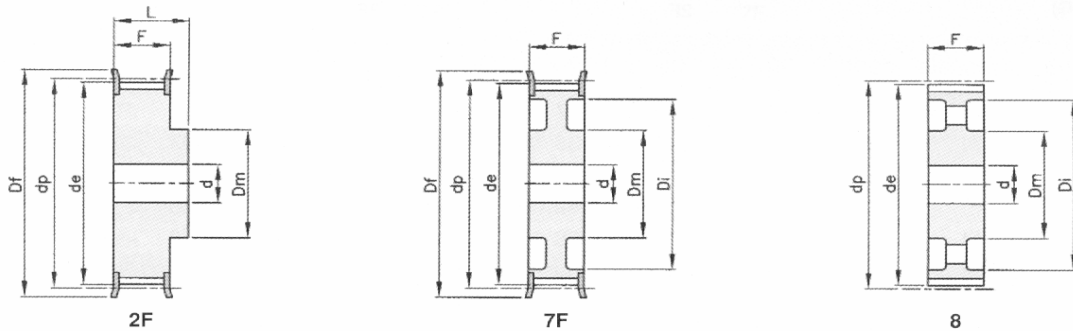


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
28 14M 115	2F	ST	28	124,78	122,12	127	100	133	148	32	
30 14M 115	2F	ST	30	133,69	130,99	138	100	133	148	32	
32 14M 115	2F	ST	32	142,60	139,88	154	100	133	148	32	
34 14M 115	2F	ST	34	151,52	148,79	160	100	133	148	32	
36 14M 115	2F	ST	36	160,43	157,68	168	120	133	148	32	
38 14M 115	2F	ST	38	169,34	166,60	183	120	133	148	32	
40 14M 115	2F	ST	40	178,25	175,49	188	135	133	148	32	
44 14M 115	2F	ST	44	196,08	193,28	211	140	133	148	32	
48 14M 115	2F	ST	48	213,90	211,11	226	150	133	148	32	
56 14M 115	2F	ST	56	249,55	246,76	256	150	133	148	32	
64 14M 115	7F	GG	64	285,21	282,41	296	150	133	148	32	
72 14M 115	8	GG	72	320,86	318,06		150	133	133	32	
80 14M 115	8	GG	80	356,51	353,71		150	133	133	32	
90 14M 115	8	GG	90	401,07	398,28		150	133	133	32	
112 14M 115	8	GG	112	499,11	496,32		150	133	133	32	
144 14M 115	8	GG	144	641,71	638,92		165	133	133	32	
168 14M 115	8	GG	168	748,66	745,87		165	133	133	32	
192 14M 115	8	GG	192	855,62	852,82		165	133	133	32	



## Zahnriemenscheiben HTD - 14M


Teilung 14 mm - Riemenbreite 170 mm

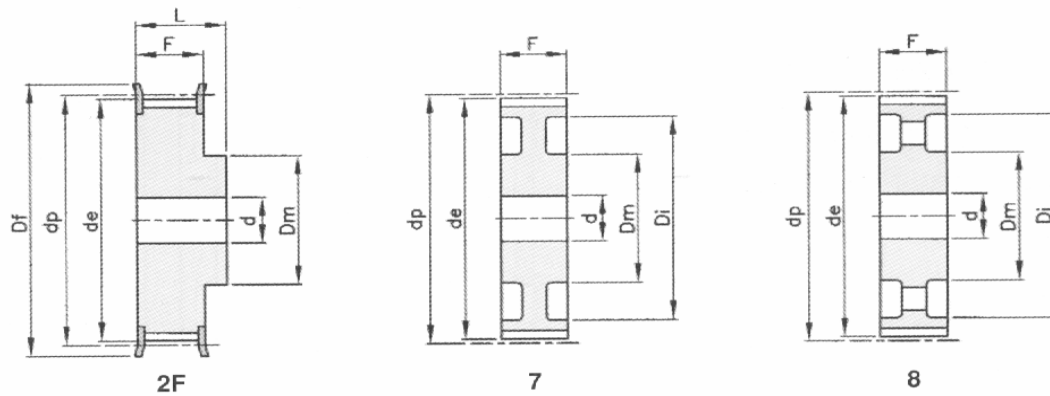


Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
28 14M 170	2F	ST	28	124,78	122,12	127	100	187	202	32	14,79
30 14M 170	2F	ST	30	133,69	130,99	138	100	187	202	32	17,24
32 14M 170	2F	ST	32	142,60	139,88	154	100	187	202	32	19,92
34 14M 170	2F	ST	34	151,52	148,79	160	100	187	202	32	22,72
36 14M 170	2F	ST	36	160,43	157,68	168	120	187	202	32	26,07
38 14M 170	2F	ST	38	169,34	166,60	183	135	187	202	32	29,71
40 14M 170	2F	ST	40	178,25	175,49	188	140	187	202	32	33,50
44 14M 170	2F	ST	44	196,08	193,28	211	160	187	202	32	
48 14M 170	2F	ST	48	213,90	211,11	226	160	187	202	32	
56 14M 170	2F	ST	56	249,55	246,76	256	160	187	202	32	
64 14M 170	2F	ST	64	285,21	282,41	296	180	187	202	32	
72 14M 170	7	GG	72	320,86	318,06		180	187	187	32	
80 14M 170	7	GG	80	356,51	353,71		180	187	187	32	71,00
90 14M 170	8	GG	90	401,07	398,28		180	187	187	38	73,00
112 14M 170	8	GG	112	499,11	496,32		200	187	187	38	95,00
144 14M 170	8	GG	144	641,71	638,92		220	187	187	38	114,00
168 14M 170	8	GG	168	748,66	745,87		220	187	187	38	142,00
192 14M 170	8	GG	192	855,62	852,82		220	187	187	38	

# Taper - Zahnriemenscheiben HTD - 5M

Teilung 5 mm - Riemenbreite 15 mm



**Antriebstechnik**  
Ketten für Antrieb und Förderung

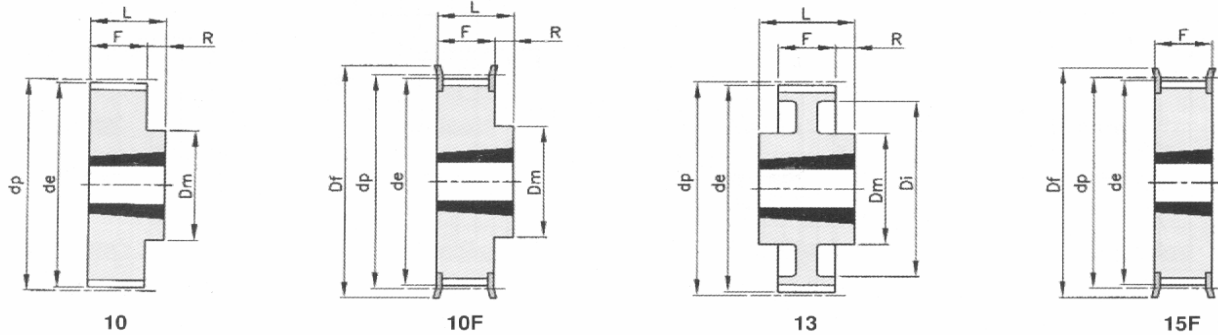


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 34 5M 15	15F	ST	34	1008	54,11	52,97	57			22	22		0,20
TL 36 5M 15	15F	ST	36	1108	57,30	56,15	60			22	22		0,25
TL 38 5M 15	15F	ST	38	1108	60,48	59,34	66			22	22		0,30
TL 40 5M 15	15F	ST	40	1108	63,66	62,52	71			22	22		0,35
TL 44 5M 15	15F	ST	44	1108	70,03	68,89	75			22	22		0,40
TL 48 5M 15	10F	ST	48	1210	76,39	75,25	83	59		22	25	3	0,46
TL 56 5M 15	10F	ST	56	1210	89,13	87,99	93	70		22	25	3	0,60
TL 64 5M 15	10F	ST	64	1210	101,86	100,72	106	80		22	25	3	0,80
TL 72 5M 15	10	ST	72	1610	114,59	113,45		92		22	25	3	1,20
TL 80 5M 15	10	ST	80	1610	127,32	126,18		92		22	25	3	1,76
TL 90 5M 15	10	ST	90	1610	143,24	142,10		92		22	25	3	2,32
TL 112 5M 15	10	ST	112	2012	178,25	177,11		110		20	32	12	3,72
TL 136 5M 15	13	ST	136	2012	216,45	215,31		110	199	20	32	6	3,82

# Taper - Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 20 mm



**Antriebstechnik**  
Ketten für Antrieb und Förderung

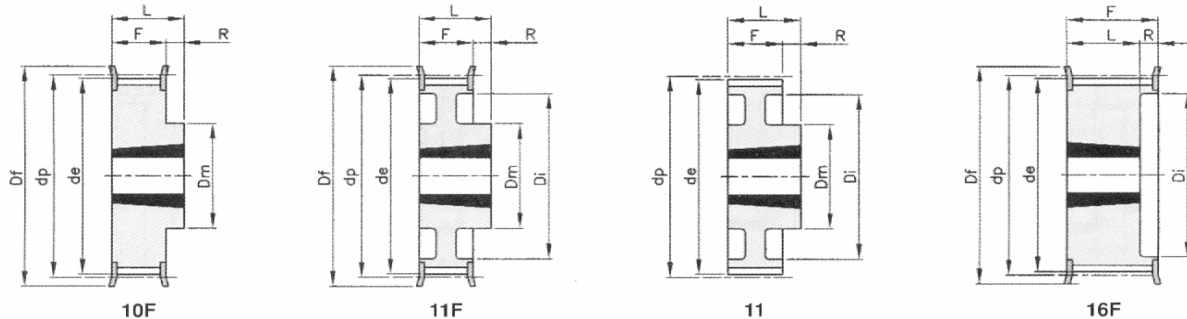








Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 22 8M 20	16F	ST	22	1008	56,02	54,65	60		37	28	22	6	0,25
TL 24 8M 20	16F	ST	24	1108	61,11	59,74	66		44	28	22	6	0,30
TL 26 8M 20	16F	ST	26	1108	66,21	64,84	71		45	28	22	6	0,36
TL 28 8M 20	16F	ST	28	1108	71,30	70,08	75		50	28	22	6	0,45
TL 30 8M 20	16F	ST	30	1108	76,39	75,13	83		58	28	22	6	0,55
TL 32 8M 20	16F	ST	32	1610	81,49	80,16	87		63	28	25	3	0,43
TL 34 8M 20	16F	ST	34	1610	86,58	85,21	91		64	28	25	3	0,57
TL 36 8M 20	16F	ST	36	1610	91,67	90,30	98		68	28	25	3	0,70
TL 38 8M 20	16F	ST	38	1610	96,77	95,39	103		72	28	25	3	0,82
TL 40 8M 20	16F	ST	40	1610	101,86	100,49	106		76	28	25	3	1,10
TL 44 8M 20	10F	ST	44	2012	112,05	110,67	119	92		28	32	4	1,20
TL 48 8M 20	10F	ST	48	2012	122,23	120,86	127	96		28	32	4	1,65
TL 56 8M 20	10F	ST	56	2012	142,60	141,23	148	110		28	32	4	2,50
TL 64 8M 20	11F	ST	64	2012	162,97	161,60	168	110	137	28	32	4	2,60
TL 72 8M 20	11F	ST	72	2012	183,35	181,97	192	110	158	28	32	4	3,40
TL 80 8M 20	11	GG	80	2012	203,72	202,35		110	180	28	32	4	3,60
TL 90 8M 20	11	GG	90	2012	229,18	227,81		110	204	28	32	4	4,10

# Taper - Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 30 mm



**Antriebstechnik**  
Ketten für Antrieb und Förderung




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 22 8M 30	16F	ST	22	1008	56,02	54,65	60		37,0	38,0	22,0	16	0,33
TL 24 8M 30	16F	ST	24	1108	61,11	59,74	66		44,0	38,0	22,0	16	0,40
TL 26 8M 30	16F	ST	26	1108	66,21	64,84	71		44,0	38,0	22,0	16	0,45
TL 28 8M 30	16F	ST	28	1210	71,30	70,08	75		50,0	38,0	25,0	13	0,50
TL 30 8M 30	15F	ST	30	1615	76,39	75,13	83			38,0	38,0		0,55
TL 32 8M 30	15F	ST	32	1615	81,49	80,16	87			38,0	38,0		0,60
TL 34 8M 30	15F	ST	34	1615	86,58	85,21	91			38,0	38,0		0,80
TL 36 8M 30	15F	ST	36	1615	91,67	90,30	98			38,0	38,0		1,00
TL 38 8M 30	15F	ST	38	1615	96,77	95,39	103			38,0	38,0		1,10
TL 40 8M 30	15F	ST	40	1615	101,86	100,49	106			38,0	38,0		1,34
TL 44 8M 30	18F	ST	44	2012	112,05	110,67	119		86,0	38,0	32,0	3	1,30
TL 48 8M 30	18F	ST	48	2012	122,23	120,86	127		90,0	38,0	32,0	3	1,80
TL 56 8M 30	18F	ST	56	2012	142,60	141,23	148		110	38,0	32,0	3	3,80
TL 64 8M 30	10F	ST	64	2517	162,97	161,60	168	125		38,0	45,0	7	4,30
TL 72 8M 30	11F	ST	72	2517	183,35	181,97	192	125	158	38,0	45,0	7	4,40
TL 80 8M 30	11	GG	80	2517	203,72	202,35		125	180	38,0	45,0	7	4,65
TL 90 8M 30	11	GG	90	2517	229,18	227,81		125	204	38,0	45,0	7	5,80
TL 112 8M 30	12	GG	112	2517	285,21	283,83		125	254	38,0	45,0	7	6,20
TL 144 8M 30	12	GG	144	2517	366,69	365,32		125	336	38,0	45,0	7	9,00

# Taper - Zahnriemenscheiben HTD - 8M


Teilung 8 mm - Riemenbreite 50 mm




**Antriebstechnik**  
Ketten für Antrieb und Förderung




14




16F




18F




19F



19



20



18

Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
------	------	----------	-----------	--------	----	----	----	----	----	---	---	---	----


TL 28 8M 50	16F	ST	28	1210	71,30	70,08	75		50	60	25	35	0,60
TL 30 8M 50	16F	ST	30	1615	76,39	75,13	83		58	60	38	22	0,65
TL 32 8M 50	16F	ST	32	1615	81,49	80,16	87		63	60	38	22	0,80
TL 34 8M 50	16F	ST	34	1615	86,58	85,21	91		65	60	38	22	1,08
TL 36 8M 50	16F	ST	36	1615	91,67	90,30	98		68	60	38	22	1,35
TL 38 8M 50	16F	ST	38	1615	96,77	95,39	103		72	60	38	22	1,65
TL 40 8M 50	18F	ST	40	2012	101,86	100,49	106		80	60	32	14	1,70
TL 44 8M 50	18F	ST	44	2012	112,05	110,67	119		86	60	32	14	1,80
TL 48 8M 50	18F	ST	48	2012	122,23	120,86	127		95	60	32	14	2,35
TL 56 8M 50	18F	ST	56	2517	142,60	141,23	148		116	60	45	7,5	3,35
TL 64 8M 50	18F	ST	64	2517	162,97	161,60	168		136	60	45	7,5	4,90
TL 72 8M 50	19F	ST	72	2517	183,35	181,97	192	125	158	60	45	7,5	6,90
TL 80 8M 50	18	GG	80	3020	203,72	202,35			180	60	51	4,5	8,90
TL 90 8M 50	19	GG	90	3020	229,18	227,81		160	204	60	51	4,5	9,90
TL 112 8M 50	19	GG	112	3020	285,21	283,83		170	254	60	51	4,5	12,10
TL 144 8M 50	20	GG	144	3020	366,69	365,32		170	336	60	51	4,5	15,40
TL 168 8M 50	14	GG	168	3525	427,81	426,44		198	395	60	65	2,5	22,80
TL 192 8M 50	14	GG	192	3525	488,92	487,55		198	455	60	65	2,5	26,50

# Taper - Zahnriemenscheiben HTD - 8M

Teilung 8 mm - Riemenbreite 85 mm



**Antriebstechnik**  
Ketten für Antrieb und Förderung

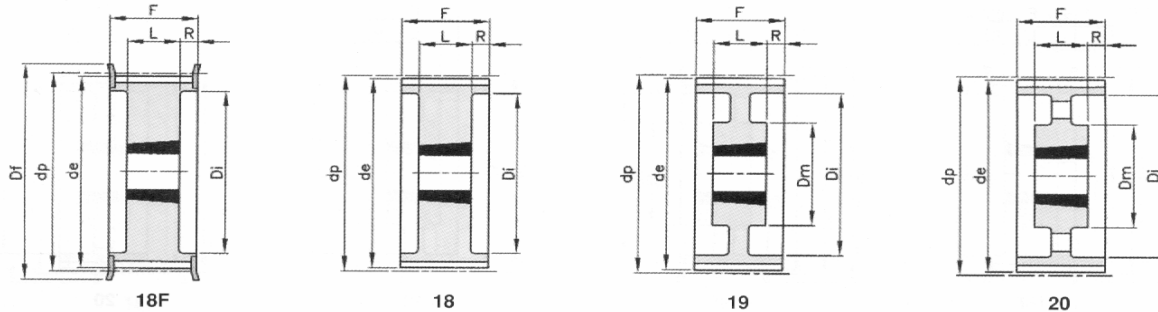





Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 34 8M 85	18F	ST	34	1615	86,58	85,22	91		65	95	38	28,5	1,50
TL 36 8M 85	18F	ST	36	1615	91,67	90,30	98		68	95	38	28,5	1,90
TL 38 8M 85	18F	ST	38	1615	96,77	95,39	103		72	95	38	28,5	2,20
TL 40 8M 85	18F	ST	40	2012	101,86	100,49	106		80	95	32	31,5	1,90
TL 44 8M 85	18F	ST	44	2012	112,05	110,67	119		86	95	32	31,5	2,30
TL 48 8M 85	18F	ST	48	2517	122,23	120,86	127		97	95	45	25,0	2,70
TL 56 8M 85	18F	St	56	2517	142,60	141,23	148		116	95	45	25,0	4,50
TL 64 8M 85	18F	St	64	2517	162,97	161,60	168		136	95	45	25,0	6,30
TL 72 8M 85	18F	ST	72	3020	183,35	181,97	192		150	95	51	22,0	8,10
TL 80 8M 85	18F	GG	80	3020	203,72	202,35			180	95	51	22,0	10,20
TL 90 8M 85	19	GG	90	3020	229,18	227,81		170	204	95	51	22,0	11,20
TL 112 8M 85	19	GG	112	3020	285,21	283,83		170	254	95	51	22,0	15,00
TL 144 8M 85	20	GG	144	3525	366,69	365,32		198	336	95	65	15,0	20,20
TL 168 8M 85	20	GG	168	3525	427,81	426,44		198	395	95	65	15,0	22,40
TL 192 8M 85	20	GG	192	3525	488,92	487,55		198	455	95	65	15,0	28,20

# Taper - Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 40 mm



**Antriebstechnik**  
Ketten für Antrieb und Förderung




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 28 14M 40	18F	ST	28	2012	124,78	122,12	127		94	54	32,0	11	2,10
TL 30 14M 40	18F	ST	30	2012	133,69	130,99	138		98	54	32,0	11	2,70
TL 32 14M 40	18F	ST	32	2012	142,60	139,88	154		108	54	32,0	11	3,40
TL 34 14M 40	18F	ST	34	2517	151,52	148,79	160		110	54	45,0	4,5	3,90
TL 36 14M 40	18F	ST	36	2517	160,43	157,68	168		120	54	45,0	4,5	4,80
TL 38 14M 40	18F	ST	38	2517	169,34	166,60	183		130	54	45,0	4,5	5,40
TL 40 14M 40	18F	ST	40	2517	178,25	175,49	188		138	54	45,0	4,5	6,00
TL 44 14M 40	18F	ST	44	3020	196,08	193,28	211		155	54	51,0	1,5	7,50
TL 48 14M 40	18F	ST	48	3020	213,90	211,11	226		170	54	51,0	1,5	8,50
TL 56 14M 40	18F	GG	56	3020	249,55	246,76	256		208	54	51,0	1,5	10,10
TL 64 14M 40	19F	GG	64	3020	285,21	282,41	296	170	240	54	51,0	1,5	
TL 72 14M 40	19	GG	72	3020	320,86	318,06		170	280	54	51,0	1,5	15,00
TL 80 14M 40	20	GG	80	3020	356,51	353,71		170	315	54	51,0	1,5	16,00
TL 90 14M 40	20	GG	90	3020	401,07	398,28		170	360	54	51,0	1,5	18,00
TL 112 14M 40	20	GG	112	3020	499,11	496,32		170	457	54	51,0	1,5	25,50
TL 144 14M 40	20	GG	144	3020	641,71	638,92		170	600	54	51,0	1,5	32,00
TL 168 14M 40	20	GG	168	3020	748,66	745,87		170	706	54	51,0	1,5	43,50
TL 192 14M 40	20	GG	192	3020	855,62	852,82		170	813	54	51,0	1,5	49,50



**Antriebstechnik**  
Ketten für Antrieb und Förderung

# Taper - Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 55 mm

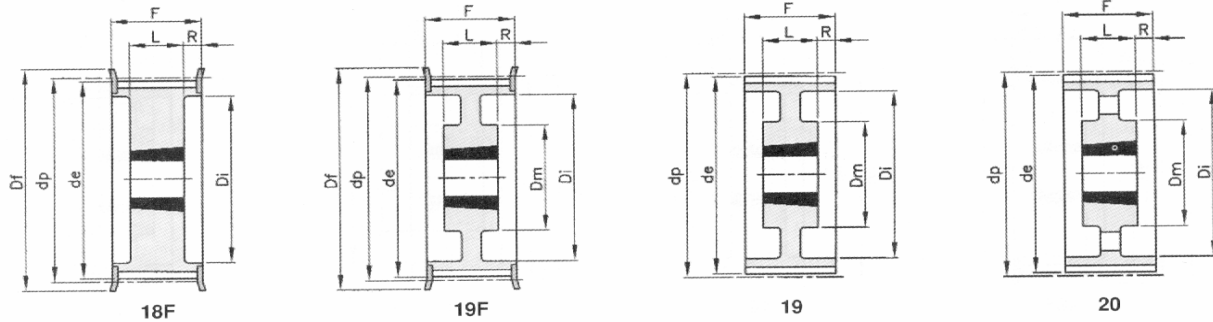

Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 28 14M 55	18F	ST	28	2012	124,78	122,12	127		94	70	32	19	2,20
TL 30 14M 55	18F	ST	30	2517	133,69	130,99	138		100	70	45	12,5	2,70
TL 32 14M 55	18F	ST	32	2517	142,60	139,88	154		108	70	45	12,5	3,60
TL 34 14M 55	18F	ST	34	2517	151,52	148,79	160		110	70	45	12,5	4,50
TL 36 14M 55	18F	ST	36	2517	160,43	157,68	168		120	70	45	12,5	5,20
TL 38 14M 55	18F	ST	38	2517	169,34	166,60	183		130	70	45	12,5	6,20
TL 40 14M 55	18F	ST	40	2517	178,25	175,49	188		138	70	45	12,5	6,90
TL 44 14M 55	18F	ST	44	3020	196,08	193,28	211		155	70	51	9,5	8,60
TL 48 14M 55	18F	ST	48	3020	213,90	211,11	226		170	70	51	9,5	10,50
TL 56 14M 55	18F	GG	56	3020	249,55	246,76	256		208	70	51	9,5	13,50
TL 64 14M 55	19F	GG	64	3020	285,21	282,41	296	170	240	70	51	9,5	14,50
TL 72 14M 55	19	GG	72	3020	320,86	318,06		170	280	70	51	9,5	16,30
TL 80 14M 55	20	GG	80	3020	356,51	353,71		170	315	70	51	9,5	17,50
TL 90 14M 55	20	GG	90	3020	401,07	398,28		170	360	70	51	9,5	20,00
TL 112 14M 55	20	GG	112	3020	499,11	496,32		170	457	70	51	9,5	28,20
TL 144 14M 55	20	GG	144	3020	641,71	638,92		170	600	70	51	9,5	36,00
TL 168 14M 55	20	GG	168	3020	748,66	745,87		170	706	70	51	9,5	48,50
TL 192 14M 55	20	GG	192	3020	855,62	852,82		170	813	70	51	9,5	52,00




# Taper - Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 85 mm




**Antriebstechnik**  
Ketten für Antrieb und Förderung

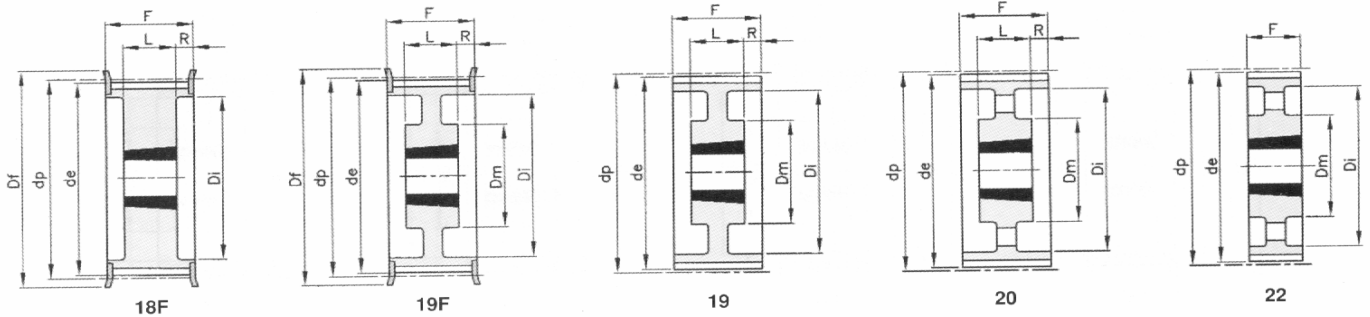


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 28 14M 85	18F	ST	28	2517	124,78	122,12	127		98	102	45	28,5	2,70
TL 30 14M 85	18F	ST	30	2517	133,69	130,99	138		100	102	45	28,5	3,80
TL 32 14M 85	18F	ST	32	2517	142,60	139,88	154		108	102	45	28,5	4,70
TL 34 14M 85	18F	ST	34	2517	151,52	148,79	160		110	102	45	28,5	6,00
TL 36 14M 85	18F	ST	36	3020	160,43	157,68	168		125	102	51	25,5	5,70
TL 38 14M 85	18F	ST	38	3020	169,34	166,60	183		130	102	51	25,5	6,80
TL 40 14M 85	18F	ST	40	3020	178,25	175,49	188		138	102	51	25,5	8,00
TL 44 14M 85	18F	ST	44	3030	196,08	193,28	211		155	102	76	13,0	11,70
TL 48 14M 85	18F	ST	48	3030	213,90	211,11	226		170	102	76	13,0	15,00
TL 56 14M 85	18F	GG	56	3525	249,55	246,76	256		210	102	65	18,5	19,00
TL 64 14M 85	19F	GG	64	3525	285,21	282,41	296	190	240	102	65	18,5	23,50
TL 72 14M 85	19	GG	72	3525	320,86	318,06		190	280	102	65	18,5	25,00
TL 80 14M 85	20	GG	80	3525	356,51	353,71		190	315	102	65	18,5	26,00
TL 90 14M 85	20	GG	90	3525	401,07	398,28		190	360	102	65	18,5	28,00
TL 112 14M 85	20	GG	112	3525	499,11	496,32		190	457	102	65	18,5	36,00
TL 144 14M 85	20	GG	144	3525	641,71	638,92		190	600	102	65	18,5	48,00
TL 168 14M 85	20	GG	168	3525	748,66	745,87		190	706	102	65	18,5	60,00
TL 192 14M 85	22	GG	192	4040	855,62	852,82		230	813	102	102		85,00

# Taper - Zahnriemenscheiben HTD - 14M

Teilung 14 mm - Riemenbreite 115 mm




**Antriebstechnik**  
Ketten für Antrieb und Förderung

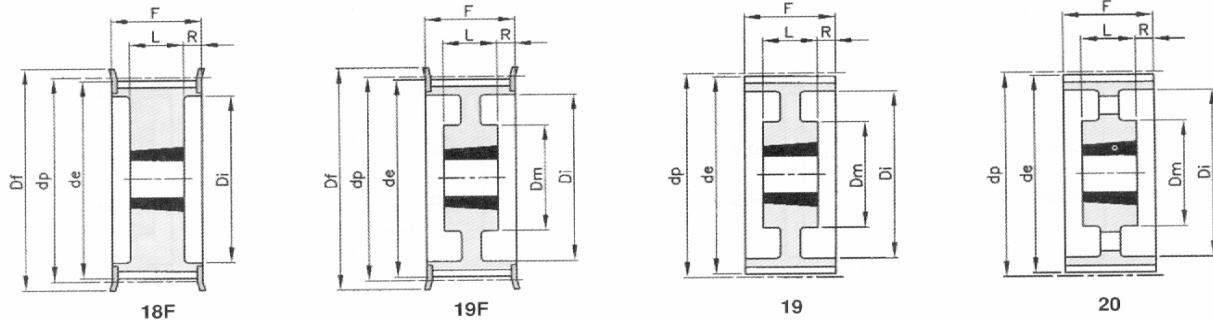

Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 28 14M 115	18F	ST	28	2517	124,78	122,12	127		98	133	45	44	3,80
TL 30 14M 115	18F	ST	30	2517	133,69	130,99	138		100	133	45	44	5,00
TL 32 14M 115	18F	ST	32	2517	142,60	139,88	154		108	133	45	44	6,80
TL 34 14M 115	18F	ST	34	2517	151,52	148,79	160		110	133	45	44	6,90
TL 36 14M 115	18F	ST	36	3020	160,43	157,68	168		125	133	51	41	7,00
TL 38 14M 115	18F	ST	38	3020	169,34	166,60	183		130	133	51	41	8,50
TL 40 14M 115	18F	ST	40	3020	178,25	175,49	188		138	133	51	41	9,10
TL 44 14M 115	18F	ST	44	3030	196,08	193,28	211		155	133	76	29	13,00
TL 48 14M 115	18F	ST	48	3030	213,90	211,11	226		170	133	76	29	16,00
TL 56 14M 115	18F	GG	56	3535	249,55	246,76	256		210	133	89	22	24,00
TL 64 14M 115	19F	GG	64	3535	285,21	282,41	296	190	240	133	89	22	32,00
TL 72 14M 115	19	GG	72	3535	320,86	318,06		190	280	133	89	22	31,00
TL 80 14M 115	20	GG	80	3535	356,51	353,71		190	315	133	89	22	32,00
TL 90 14M 115	20	GG	90	3535	401,07	398,28		190	360	133	89	22	37,00
TL 112 14M 115	20	GG	112	3535	499,11	496,32		190	457	133	89	22	45,00
TL 144 14M 115	20	GG	144	4040	641,71	638,92		230	600	133	102	16	63,00
TL 168 14M 115	20	GG	168	4040	748,66	745,87		230	706	133	102	16	77,50
TL 192 14M 115	20	GG	192	4040	855,62	852,82		230	813	133	102	16	95,00

# Zahnriemenscheiben T 2,5



Teilung 2,5 mm - Riemenbreite 6 mm

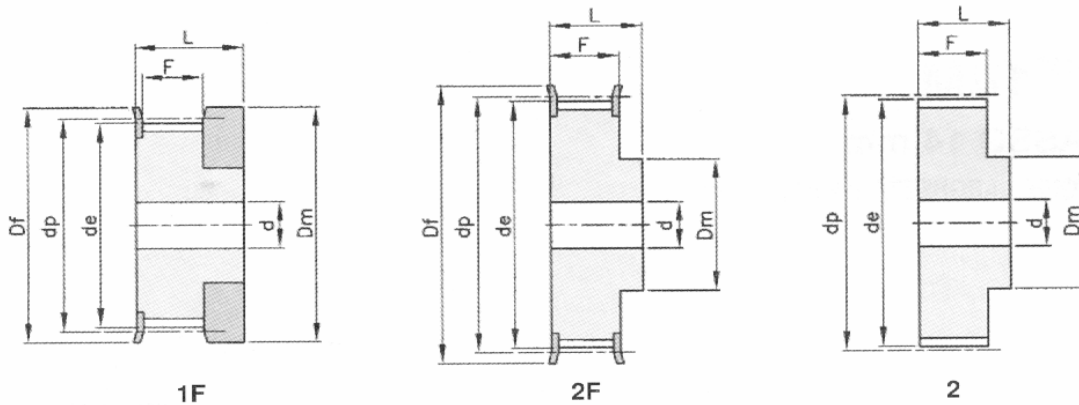

Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
16 T 2,5 12	1F	Al	12		9,00	13	12	9	16		0,01
16 T 2,5 14	1F	Al	14		10,60	15	14	9	16		0,01
16 T 2,5 15	1F	Al	15		11,40	15	15	9	16		0,01
16 T 2,5 16	1F	Al	16		12,20	16	16	9	16		0,01
16 T 2,5 18	2F	Al	18		13,80	18	10	10	16	3	0,01
16 T 2,5 19	2F	Al	19		14,60	18	10	10	16	3	0,01
16 T 2,5 20	2F	Al	20		15,40	20	11	10	16	3	0,01
16 T 2,5 22	2F	Al	22		17,00	23	11	10	16	3	0,01
16 T 2,5 24	2F	Al	24		18,55	23	12	10	16	3	0,01
16 T 2,5 25	2F	Al	25		19,35	23	13	10	16	3	0,01
16 T 2,5 26	2F	Al	26		20,15	25	14	10	16	4	0,01
16 T 2,5 28	2F	Al	28		21,75	25	14	10	16	4	0,02
16 T 2,5 30	2F	Al	30		23,35	28	16	10	16	6	0,02
16 T 2,5 32	2F	Al	32		24,95	32	16	10	16	6	0,02
16 T 2,5 36	2F	Al	36		28,10	36	20	10	16	6	0,03
16 T 2,5 40	2F	Al	40		31,30	38	22	10	16	6	0,03
16 T 2,5 44	2	Al	44		34,50		24	10	16	6	0,04
16 T 2,5 48	2	Al	48		37,70		26	10	16	6	0,05
16 T 2,5 60	2	Al	60		47,25		34	10	16	8	0,07

## Zahnriemenscheiben T 5



Teilung 5 mm - Riemenbreite 10 mm

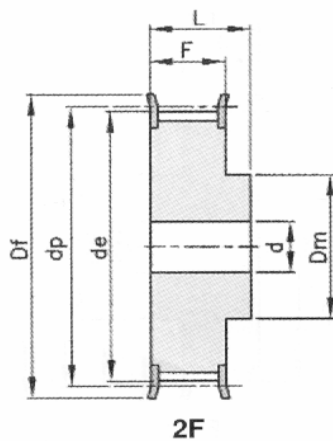

Code	Type	Material	Zähnezahl	de	Df	Dm	F	L	d	kg
21 T 5 10	2F	Al	10	15,05	19,5	8	15	21		0,01
21 T 5 12	2F	Al	12	18,25	23	10	15	21		0,01
21 T 5 14	2F	Al	14	21,45	25	13	15	21		0,02
21 T 5 15	2F	Al	15	23,05	28	16	15	21		0,02
21 T 5 16	2F	Al	16	24,60	32	18	15	21		0,03
21 T 5 18	2F	Al	18	27,80	32	20	15	21		0,03
21 T 5 19	2F	Al	19	29,40	36	22	15	21		0,04
21 T 5 20	2F	Al	20	31,00	36	23	15	21		0,04
21 T 5 22	2F	Al	22	34,25	38	24	15	21		0,05
21 T 5 24	2F	Al	24	37,40	42	26	15	21		0,06
21 T 5 25	2F	Al	25	38,95	44	26	15	21		0,06
21 T 5 26	2F	Al	26	40,60	44	26	15	21		0,06
21 T 5 27	2F	Al	27	42,20	48	30	15	21	8	0,07
21 T 5 28	2F	Al	28	43,75	48	32	15	21	8	0,07
21 T 5 30	2F	Al	30	46,95	51	34	15	21	8	0,07
21 T 5 32	2F	Al	32	50,10	51	38	15	21	8	0,09
21 T 5 36	2F	Al	36	56,45	63	38	15	21	8	0,11
21 T 5 40	2F	Al	40	62,85	66	40	15	21	8	0,14
21 T 5 42	2F	Al	42	66,00	71	40	15	21	8	0,18
21 T 5 44	2	Al	44	69,20		45	15	21	8	0,18
21 T 5 48	2	Al	48	75,55		50	15	21	8	0,20
21 T 5 60	2	Al	60	94,65		65	15	21	8	0,31

## Zahnriemenscheiben T 5



Teilung 5 mm - Riemenbreite 16 mm

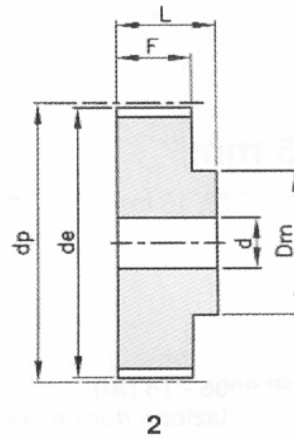

Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
27 T 5 10	2F	Al	10		15,05	20	8	21	27		0,02
27 T 5 12	2F	Al	12		18,25	23	10	21	27		0,02
27 T 5 14	2F	Al	14		21,45	25	13	21	27		0,03
27 T 5 15	2F	Al	15		23,05	28	16	21	27		0,03
27 T 5 16	2F	Al	16		24,60	32	18	21	27		0,04
27 T 5 18	2F	Al	18		27,80	32	20	21	27		0,04
27 T 5 19	2F	Al	19		29,40	36	22	21	27		0,05
27 T 5 20	2F	Al	20		31,00	36	23	21	27		0,06
27 T 5 22	2F	Al	22		34,25	38	24	21	27		0,06
27 T 5 24	2F	Al	24		37,40	42	26	21	27		0,08
27 T 5 25	2F	Al	25		38,95	44	26	21	27		0,08
27 T 5 26	2F	Al	26		40,60	44	26	21	27		0,09
27 T 5 27	2F	Al	27		42,20	48	30	21	27	8	0,09
27 T 5 28	2F	Al	28		43,75	48	32	21	27	8	0,09
27 T 5 30	2F	Al	30		46,95	51	34	21	27	8	0,10
27 T 5 32	2F	Al	32		50,10	54	38	21	27	8	0,12
27 T 5 36	2F	Al	36		56,45	63	38	21	27	8	0,16
27 T 5 40	2F	Al	40		62,85	66	40	21	27	8	0,19
27 T 5 42	2F	Al	42		66,00	71	40	21	27	8	0,20
27 T 5 44	2	Al	44		69,20		45	21	27	8	0,23
27 T 5 48	2	Al	48		75,55		50	21	27	8	0,28
27 T 5 60	2	Al	60		94,65		65	21	27	8	0,43

## Zahnriemenscheiben T 5



Teilung 5 mm - Riemenbreite 25 mm

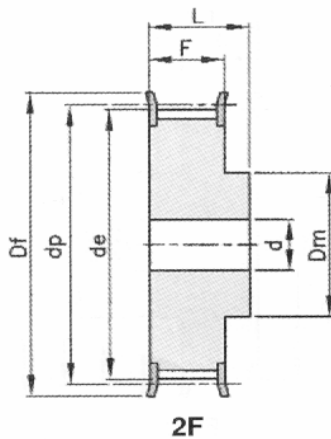

Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
36 T 5 10	2F	Al	10		15,05	20	8	30	36		0,02
36 T 5 12	2F	Al	12		18,25	23	10	30	36		0,03
36 T 5 14	2F	Al	14		21,45	25	13	30	36		0,04
36 T 5 15	2F	Al	15		23,05	28	16	30	36		0,04
36 T 5 16	2F	Al	16		24,60	32	18	30	36		0,05
36 T 5 18	2F	Al	18		27,80	32	20	30	36		0,06
36 T 5 19	2F	Al	19		29,40	36	22	30	36		0,07
36 T 5 20	2F	Al	20		31,00	36	23	30	36		0,08
36 T 5 22	2F	Al	22		34,25	38	24	30	36		0,08
36 T 5 24	2F	Al	24		37,40	42	26	30	36		0,11
36 T 5 25	2F	Al	25		38,95	44	26	30	36		0,12
36 T 5 26	2F	Al	26		40,60	44	26	30	36		0,12
36 T 5 27	2F	Al	27		42,20	48	30	30	36	8	0,13
36 T 5 28	2F	Al	28		43,75	48	32	30	36	8	0,14
36 T 5 30	2F	Al	30		46,95	51	34	30	36	8	0,15
36 T 5 32	2F	Al	32		50,10	54	38	30	36	8	0,18
36 T 5 36	2F	Al	36		56,45	63	38	30	36	8	0,23
36 T 5 40	2F	Al	40		62,85	66	40	30	36	8	0,28
36 T 5 42	2F	Al	42		66,00	71	40	30	36	8	0,29
36 T 5 44	2	Al	44		69,20		45	30	36	8	0,31
36 T 5 48	2	Al	48		75,55		50	30	36	8	0,40
36 T 5 60	2	Al	60		94,65		65	30	36	8	0,61

# Zahnriemenscheiben T 10



Teilung 10 mm - Riemenbreite 16 mm



Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
31 T 10 12	2F	Al	12		36,35	42	28	21	31	6	0,08
31 T 10 14	2F	Al	14		42,70	48	32	21	31	8	0,10
31 T 10 15	2F	Al	15		45,90	51	32	21	31	8	0,12
31 T 10 16	2F	Al	16		49,10	54	35	21	31	8	0,13
31 T 10 18	2F	Al	18		55,45	60	40	21	31	8	0,17
31 T 10 19	2F	Al	19		58,65	66	44	21	31	8	0,18
31 T 10 20	2F	Al	20		61,80	66	46	21	31	8	0,21
31 T 10 22	2F	Al	22		68,20	75	52	21	31	8	0,25
31 T 10 24	2F	Al	24		74,55	83	58	21	31	8	0,29
31 T 10 25	2F	Al	25		77,75	83	60	21	31	8	0,31
31 T 10 26	2F	Al	26		80,90	87	60	21	31	8	0,36
31 T 10 27	2F	Al	27		84,10	91	60	21	31	8	0,37
31 T 10 28	2F	Al	28		87,25	93	60	21	31	8	0,40
31 T 10 30	2F	Al	30		93,65	97	60	21	31	8	0,44
31 T 10 32	2F	Al	32		100,00	106	65	21	31	10	0,49
31 T 10 36	2F	Al	36		112,75	119	70	21	31	10	0,62
31 T 10 40	2F	Al	40		125,45	131	80	21	31	10	0,77
31 T 10 44	2	Al	44		138,20		88	21	31	10	1,00
31 T 10 48	2	Al	48		150,95		95	21	31	16	1,10
31 T 10 60	2	Al	60		189,15		110	21	31	16	1,70

## Zahnriemenscheiben T 10

Teilung 10 mm - Riemenbreite 25 mm





Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
40 T 10 12	2F	Al	12		36,35	42	28	30	40	6	0,1
40 T 10 14	2F	Al	14		42,70	48	32	30	40	8	0,13
40 T 10 15	2F	Al	15		45,90	51	32	30	40	8	0,15
40 T 10 16	2F	Al	16		49,10	54	35	30	40	8	0,18
40 T 10 18	2F	Al	18		55,45	60	40	30	40	8	0,22
40 T 10 19	2F	Al	19		58,65	66	44	30	40	8	0,25
40 T 10 20	2F	Al	20		61,80	66	46	30	40	8	0,28
40 T 10 22	2F	Al	22		68,20	75	52	30	40	8	0,34
40 T 10 24	2F	Al	24		74,55	83	58	30	40	8	0,39
40 T 10 25	2F	Al	25		77,75	83	60	30	40	8	0,42
40 T 10 26	2F	Al	26		80,90	87	60	30	40	8	0,48
40 T 10 27	2F	Al	27		84,10	91	60	30	40	8	0,54
40 T 10 28	2F	Al	28		87,25	93	60	30	40	8	0,55
40 T 10 30	2F	Al	30		93,65	97	60	30	40	8	0,64
40 T 10 32	2F	Al	32		100,00	106	65	30	40	10	0,69
40 T 10 36	2F	Al	36		112,75	119	70	30	40	10	0,87
40 T 10 40	2F	Al	40		125,45	131	80	30	40	10	1,07
40 T 10 44	2	Al	44		138,20		88	30	40	10	1,35
40 T 10 48	2	Al	48		150,95		95	30	40	16	1,52
40 T 10 60	2	Al	60		189,15		110	30	40	16	2,34



## Zahnriemenscheiben T 10



Teilung 10 mm - Riemenbreite 32 mm



Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
47 T 10 18	2F	Al	18		55,45	60	40	37	47	10	0,25
47 T 10 19	2F	Al	19		58,65	66	44	37	47	10	0,29
47 T 10 20	2F	Al	20		61,80	66	46	37	47	12	0,32
47 T 10 22	2F	Al	22		68,20	75	52	37	47	12	0,39
47 T 10 24	2F	Al	24		74,55	83	58	37	47	12	0,47
47 T 10 25	2F	Al	25		77,75	83	60	37	47	12	0,53
47 T 10 26	2F	Al	26		80,90	87	60	37	47	12	0,56
47 T 10 27	2F	Al	27		84,10	91	60	37	47	12	0,60
47 T 10 28	2F	Al	28		87,25	93	60	37	47	12	0,64
47 T 10 30	2F	Al	30		93,65	97	60	37	47	12	0,74
47 T 10 32	2F	Al	32		100,00	106	65	37	47	12	0,84
47 T 10 36	2F	Al	36		112,75	119	70	37	47	16	1,06
47 T 10 40	2F	Al	40		125,45	131	80	37	47	16	1,32
47 T 10 44	2	Al	44		138,20		88	37	47	16	1,61
47 T 10 48	2	Al	48		150,95		95	37	47	16	1,93
47 T 10 60	2	Al	60		189,10		110	37	47	16	3,00

## Zahnriemenscheiben T 10



Teilung 10 mm - Riemenbreite 50 mm



Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
66 T 10 18	2F	Al	18		55,45	60	40	56	66	10	0,42
66 T 10 19	2F	Al	19		58,65	66	44	56	66	10	0,47
66 T 10 20	2F	Al	20		61,80	66	46	56	66	12	0,52
66 T 10 22	2F	Al	22		68,20	75	52	56	66	12	0,57
66 T 10 24	2F	Al	24		74,55	83	58	56	66	12	0,74
66 T 10 25	2F	Al	25		77,75	83	60	56	66	12	0,77
66 T 10 26	2F	Al	26		80,90	87	60	56	66	12	0,82
66 T 10 27	2F	Al	27		84,10	91	60	56	66	12	0,95
66 T 10 28	2F	Al	28		87,25	93	60	56	66	12	0,96
66 T 10 30	2F	Al	30		93,65	97	60	56	66	12	1,17
66 T 10 32	2F	Al	32		100,00	106	65	56	66	12	1,30
66 T 10 36	2F	Al	36		112,75	119	70	56	66	16	1,64
66 T 10 40	2F	Al	40		125,45	131	80	56	66	16	2,00
66 T 10 44	2	Al	44		138,20		88	56	66	16	2,36
66 T 10 48	2	Al	48		150,95		95	56	66	16	2,83
66 T 10 60	2	Al	60		189,10		110	56	66	16	4,37

# Zahnriemenscheiben BAT 5



Teilung 5 mm - Riemenbreite 10 mm

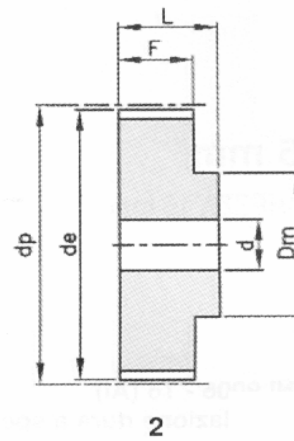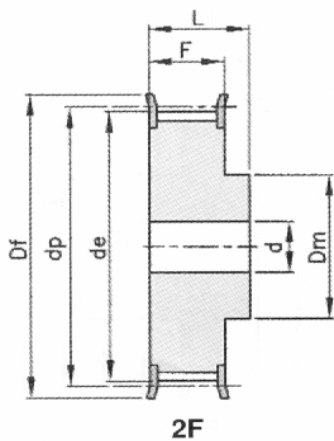

Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
21 BAT 5 12	2F	Al	12		17,85	23	10	15	21		0,01
21 BAT 5 14	2F	Al	14		21,05	25	13	15	21		0,02
21 BAT 5 15	2F	Al	15		22,65	28	16	15	21		0,02
21 BAT 5 16	2F	Al	16		24,20	32	18	15	21		0,03
21 BAT 5 18	2F	Al	18		27,40	32	20	15	21		0,03
21 BAT 5 19	2F	Al	19		29,00	36	22	15	21		0,04
21 BAT 5 20	2F	Al	20		30,60	36	23	15	21		0,04
21 BAT 5 22	2F	Al	22		33,85	38	24	15	21		0,05
21 BAT 5 24	2F	Al	24		37,00	42	26	15	21		0,06
21 BAT 5 25	2F	Al	25		38,55	44	26	15	21		0,06
21 BAT 5 26	2F	Al	26		40,20	44	26	15	21		0,06
21 BAT 5 27	2F	Al	27		41,80	48	30	15	21	8	0,07
21 BAT 5 28	2F	Al	28		43,35	48	32	15	21	8	0,07
21 BAT 5 30	2F	Al	30		46,55	51	34	15	21	8	0,07
21 BAT 5 32	2F	Al	32		49,70	54	38	15	21	8	0,09
21 BAT 5 36	2F	Al	36		56,05	63	38	15	21	8	0,11
21 BAT 5 40	2F	Al	40		62,45	66	40	15	21	8	0,14
21 BAT 5 42	2F	Al	42		65,60	71	40	15	21	8	0,18
21 BAT 5 44	2	Al	44		68,80		45	15	21	8	0,18
21 BAT 5 48	2	Al	48		75,15		50	15	21	8	0,2
21 BAT 5 60	2	Al	60		94,25		65	15	21	8	0,31

## Zahnriemenscheiben BAT 5



Teilung 5 mm - Riemenbreite 16 mm

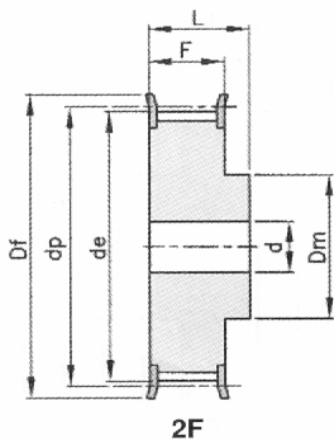

Code	Type	Material	Zähnezahl		de	Df	Dm	F	L	d	kg
27 BAT 5 12	2F	Al	12		17,85	23	10	21	27		0,02
27 BAT 5 14	2F	Al	14		21,05	25	13	21	27		0,03
27 BAT 5 15	2F	Al	15		22,65	28	16	21	27		0,03
27 BAT 5 16	2F	Al	16		24,20	32	18	21	27		0,04
27 BAT 5 18	2F	Al	18		27,40	32	20	21	27		0,04
27 BAT 5 19	2F	Al	19		29,00	36	22	21	27		0,05
27 BAT 5 20	2F	Al	20		30,60	36	23	21	27		0,06
27 BAT 5 22	2F	Al	22		33,85	38	24	21	27		0,06
27 BAT 5 24	2F	Al	24		37,00	42	26	21	27		0,08
27 BAT 5 25	2F	Al	25		38,55	44	26	21	27		0,08
27 BAT 5 26	2F	Al	26		40,20	44	26	21	27		0,09
27 BAT 5 27	2F	Al	27		41,80	48	30	21	27		0,09
27 BAT 5 28	2F	Al	28		43,35	48	32	21	27		0,09
27 BAT 5 30	2F	Al	30		46,55	51	34	21	27		0,10
27 BAT 5 32	2F	Al	32		49,70	54	38	21	27	8	0,12
27 BAT 5 36	2F	Al	36		56,05	63	38	21	27	8	0,16
27 BAT 5 40	2F	Al	40		62,45	66	40	21	27	8	0,19
27 BAT 5 42	2F	Al	42		65,60	71	40	21	27	8	0,20
27 BAT 5 44	2	Al	44		68,80		45	21	27	8	0,23
27 BAT 5 48	2	Al	48		75,15		50	21	27	8	0,28
27 BAT 5 60	2	Al	60		94,25		65	21	27	8	0,43

## Zahnriemenscheiben BAT 5



Teilung 5 mm - Riemenbreite 25 mm



Code	Type	Material	Zähnezahl	de	Df	Dm	F	L	d	kg
36 BAT 5 12	2F	Al	12	17,85	23	10	30	36		0,03
36 BAT 5 14	2F	Al	14	21,05	25	13	30	36		0,04
36 BAT 5 15	2F	Al	15	22,65	28	16	30	36		0,04
36 BAT 5 16	2F	Al	16	24,20	32	18	30	36		0,05
36 BAT 5 18	2F	Al	18	27,40	32	20	30	36		0,06
36 BAT 5 19	2F	Al	19	29,00	36	22	30	36		0,07
36 BAT 5 20	2F	Al	20	30,60	36	23	30	36		0,08
36 BAT 5 22	2F	Al	22	33,85	38	24	30	36		0,08
36 BAT 5 24	2F	Al	24	37,00	42	26	30	36	8	0,11
36 BAT 5 25	2F	Al	25	38,55	44	26	30	36	8	0,12
36 BAT 5 26	2F	Al	26	40,20	44	26	30	36	8	0,12
36 BAT 5 27	2F	Al	27	41,80	48	30	30	36	8	0,13
36 BAT 5 28	2F	Al	28	43,35	48	32	30	36	8	0,14
36 BAT 5 30	2F	Al	30	46,55	51	34	30	36	8	0,15
36 BAT 5 32	2F	Al	32	49,70	54	38	30	36	8	0,18
36 BAT 5 36	2F	Al	36	56,05	63	38	30	36	8	0,23
36 BAT 5 40	2F	Al	40	62,45	66	40	30	36	8	0,28
36 BAT 5 42	2F	Al	42	65,60	71	40	30	36	8	0,29
36 BAT 5 44	2	Al	44	68,80		45	30	36	8	0,31
36 BAT 5 48	2	Al	48	75,15		50	30	36	8	0,40
36 BAT 5 60	2	Al	60	94,25		65	30	36	8	0,61

## Zahnriemenscheiben BAT 10



Teilung 10 mm - Riemenbreite 16 mm

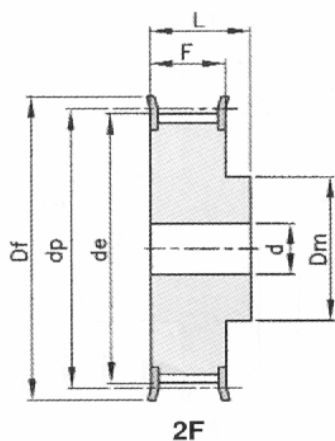

Code	Type	Material	Zähnezahl	de	Df	Dm	F	L	d	kg
31 BAT 10 15	2F	Al	15	45,90	51	32	21	31	8	0,12
31 BAT 10 16	2F	Al	16	49,10	54	35	21	31	8	0,13
31 BAT 10 18	2F	Al	18	55,45	60	40	21	31	8	0,17
31 BAT 10 19	2F	Al	19	58,65	66	44	21	31	8	0,18
31 BAT 10 20	2F	Al	20	61,80	66	46	21	31	8	0,21
31 BAT 10 22	2F	Al	22	68,20	75	52	21	31	8	0,25
31 BAT 10 24	2F	Al	24	74,55	83	58	21	31	8	0,29
31 BAT 10 25	2F	Al	25	77,75	83	60	21	31	8	0,31
31 BAT 10 26	2F	Al	26	80,90	87	60	21	31	8	0,36
31 BAT 10 27	2F	Al	27	84,05	91	60	21	31	8	0,37
31 BAT 10 28	2F	Al	28	87,25	93	60	21	31	8	0,40
31 BAT 10 30	2F	Al	30	93,65	97	60	21	31	8	0,44
31 BAT 10 32	2F	Al	32	100,00	106	65	21	31	10	0,49
31 BAT 10 36	2F	Al	36	112,75	119	70	21	31	10	0,62
31 BAT 10 40	2F	Al	40	125,45	131	80	21	31	10	0,77
31 BAT 10 44	2	Al	44	138,20		88	21	31	10	1,00
31 BAT 10 48	2	Al	48	150,95		95	21	31	16	1,10
31 BAT 10 60	2	Al	60	189,15		110	21	31	16	1,70

## Zahnriemenscheiben BAT 10



Teilung 10 mm - Riemenbreite 25 mm

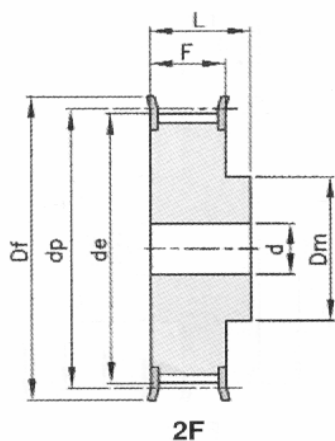

Code	Type	Material	Zähnezahl	de	Df	Dm	F	L	d	kg
40 BAT 10 15	2F	Al	15	45,90	51	32	30	40	8	0,15
40 BAT 10 16	2F	Al	16	49,10	54	35	30	40	8	0,18
40 BAT 10 18	2F	Al	18	55,45	60	40	30	40	8	0,22
40 BAT 10 19	2F	Al	19	58,65	66	44	30	40	8	0,25
40 BAT 10 20	2F	Al	20	61,80	66	46	30	40	8	0,28
40 BAT 10 22	2F	Al	22	68,20	75	52	30	40	8	0,34
40 BAT 10 24	2F	Al	24	74,55	83	58	30	40	8	0,39
40 BAT 10 25	2F	Al	25	77,75	83	60	30	40	8	0,42
40 BAT 10 26	2F	Al	26	80,90	87	60	30	40	8	0,48
40 BAT 10 27	2F	Al	27	84,05	91	60	30	40	8	0,54
40 BAT 10 28	2F	Al	28	87,25	93	60	30	40	8	0,55
40 BAT 10 30	2F	Al	30	93,65	97	60	30	40	8	0,64
40 BAT 10 32	2F	Al	32	100,00	106	65	30	40	10	0,69
40 BAT 10 36	2F	Al	36	112,75	119	70	30	40	10	0,87
40 BAT 10 40	2F	Al	40	125,45	131	80	30	40	10	1,07
40 BAT 10 44	2	Al	44	138,20		88	30	40	10	1,35
40 BAT 10 48	2	Al	48	150,95		95	30	40	16	1,52
40 BAT 10 60	2	Al	60	189,15		110	30	40	16	2,34

# Zahnriemenscheiben BAT 10

Teilung 10 mm - Riemenbreite 32 mm





Code	Type	Material	Zähnezahl	de	Df	Dm	F	L	d	kg
47 BAT 10 18	2F	Al	18	55,45	60	40	37	47	10	0,25
47 BAT 10 19	2F	Al	19	58,65	66	44	37	47	10	0,29
47 BAT 10 20	2F	Al	20	61,80	66	46	37	47	12	0,32
47 BAT 10 22	2F	Al	22	68,20	75	52	37	47	12	0,39
47 BAT 10 24	2F	Al	24	74,55	83	58	37	47	12	0,47
47 BAT 10 25	2F	Al	25	77,75	83	60	37	47	12	0,53
47 BAT 10 26	2F	Al	26	80,90	87	60	37	47	12	0,56
47 BAT 10 27	2F	Al	27	84,05	91	60	37	47	12	0,60
47 BAT 10 28	2F	Al	28	87,25	93	60	37	47	12	0,64
47 BAT 10 30	2F	Al	30	93,65	97	60	37	47	12	0,74
47 BAT 10 32	2F	Al	32	100,00	106	65	37	47	12	0,84
47 BAT 10 36	2F	Al	36	112,75	119	70	37	47	16	1,06
47 BAT 10 40	2F	Al	40	125,45	131	80	37	47	16	1,32
47 BAT 10 44	2	Al	44	138,20		88	37	47	16	1,61
47 BAT 10 48	2	Al	48	150,95		95	37	47	16	1,93
47 BAT 10 60	2	Al	60	189,15		110	37	47	16	3,00



# Zahnriemenscheiben BAT 10

Teilung 10 mm - Riemenbreite 50 mm



Code	Type	Material	Zähnezahl	de	Df	Dm	F	L	d	kg
66 BAT 10 18	2F	Al	18	55,45	60	40	56	66	10	0,42
66 BAT 10 19	2F	Al	19	58,65	66	44	56	66	10	0,47
66 BAT 10 20	2F	Al	20	61,80	66	46	56	66	12	0,52
66 BAT 10 22	2F	Al	22	68,20	75	52	56	66	12	0,57
66 BAT 10 24	2F	Al	24	74,55	83	58	56	66	12	0,74
66 BAT 10 25	2F	Al	25	77,75	83	60	56	66	12	0,77
66 BAT 10 26	2F	Al	26	80,90	87	60	56	66	12	0,82
66 BAT 10 27	2F	Al	27	84,05	91	60	56	66	12	0,95
66 BAT 10 28	2F	Al	28	87,25	93	60	56	66	12	0,96
66 BAT 10 30	2F	Al	30	93,65	97	60	56	66	12	1,17
66 BAT 10 32	2F	Al	32	100,00	106	65	56	66	12	1,30
66 BAT 10 36	2F	Al	36	112,75	119	70	56	66	16	1,64
66 BAT 10 40	2F	Al	40	125,45	131	80	56	66	16	2,00
66 BAT 10 44	2	Al	44	138,20		88	56	66	16	2,36
66 BAT 10 48	2	Al	48	150,95		95	56	66	16	2,83
66 BAT 10 60	2	Al	60	189,15		110	56	66	16	4,37