




Duplex-Rollenketten rostfrei (Maße nach DIN 8187)

Stainless steel duplex roller chains (dimensions to DIN 8187)

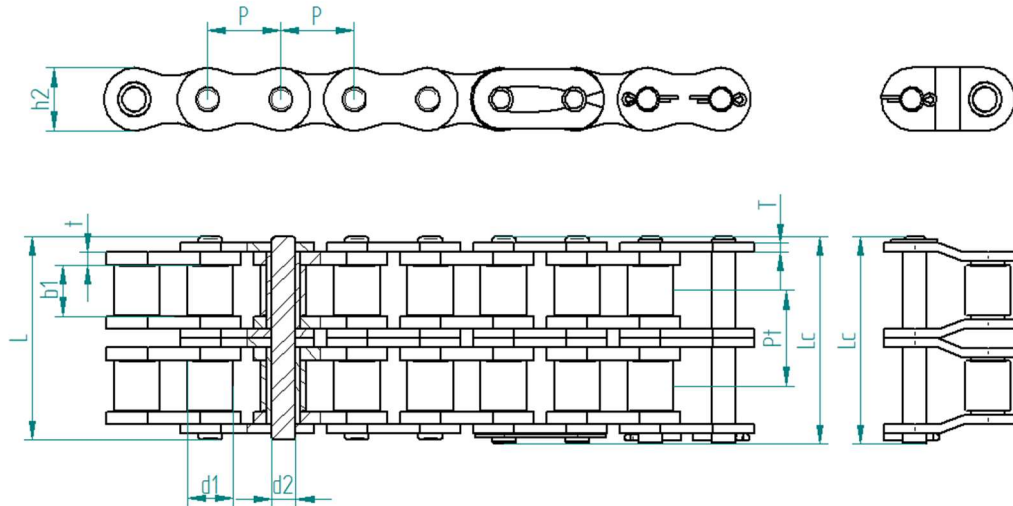

Kettentyp	Teilung	lichte Weite	Rollen- Ø	Bolzen- Ø	Bolzenlänge		Laschen- höhe	Laschen- dicke		Quer- teilung	Min. Bruchkraft	Mittlere Bruchkraft	Gewicht / Meter
Chain type	Pitch	Inner width	Roller - Ø	Pin - Ø	Pin length		Plate height	Plate thickness		Traverse pitch	Min. tensile strength	Average tensile str.	Weight / meter
ISO	P [mm]	b1 min. [mm]	d1 max. [mm]	d2 max. [mm]	L max. [mm]	Lc max. [mm]	h2 max. [mm]	t [mm]	T [mm]	Pt [mm]	FU [kN]	FB [kN]	q [kg/m]

05 B-2 SS	8,00	3,00	5,00	2,31	13,9	14,5	7,10	0,80	0,80	5,64	5,0	5,0	0,36
06 B-2 SS ¹	9,525	5,72	6,35	3,28	23,4	24,4	8,20	1,20	1,20	10,24	11,0	11,0	0,79
08 B-2 SS	12,70	7,75	8,51	4,45	31,2	32,2	11,80	1,50	1,50	13,92	20,8	20,8	1,32
10 B-2 SS	15,875	9,65	10,16	5,08	36,1	37,5	14,70	1,70	1,70	16,59	28,9	28,9	1,88
12 B-2 SS	19,05	11,68	12,07	5,72	42,0	43,6	16,00	1,80	1,80	19,46	37,6	37,6	2,38
16 B-2 SS	25,40	17,02	15,88	8,28	68,0	69,3	21,00	4,00	3,00	31,88	68,9	68,9	5,41
20 B-2 SS	31,75	19,56	19,05	10,19	77,8	81,5	26,40	4,00	4,00	36,45	110,5	110,5	7,27
24 B-2 SS	38,10	25,40	25,40	14,63	101,7	106,2	33,20	6,00	4,80	48,36	182,0	182,0	13,48
28 B-2 SS	44,45	30,99	27,94	15,90	124,6	129,1	36,70	7,50	6,00	59,56	234,0	234,0	16,65
32 B-2 SS	50,80	30,99	29,21	17,81	124,6	129,6	42,00	7,00	6,00	58,55	146,0	146,0	21,04

¹ mit geraden Laschen

¹ with straight side plates